
ED

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | UGR <19 | IP 20 | EN 62 471 RG 0 | 100 000 L70B50


η_{ef} (lm/W) 142-153




ED A/2



ED Z60



ED Z90



ED Z25AS

Recessed LED fitting

Body:
White coated metal sheet

Optic:
Symetric linear PMMA lenses
Z60 - narrow beam 60°
Z90 - wide beam 90°
Z25AS -asymmetric

Application:
- recessed installation into modular ceilng 600 or 625 mm.
- EK…. /SDK = direct installation into a gypsum plasterboard

Accessories:
UQRAM - white coated aluminium frame for surface installation
QVESTRAM - white coated aluminium frame for recessed installation into a gypsum plasterboard
NM - independent emergency module

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	×	○	○

● default ○ optional × not possible


OPTIC ED


ED /3



LED PROFIL



DRIVER


Codes: ED4000A3Z60/3/600/ND


ED	4000	A	3	Z60	/3	/600	/ND
Luminaire type ED - linear optics	Light output (lm)	Body shape A - square 600x600 mm C - rectangle 1200x300 mm	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K 5 = 5700 K	Optic: Z60 - narrow 60° Z90 - wide 90° Z25AS - asymmetric	Nr o f LED modules	Modul	Driver type: ND - non-dimmable DALI - dimmable DALI









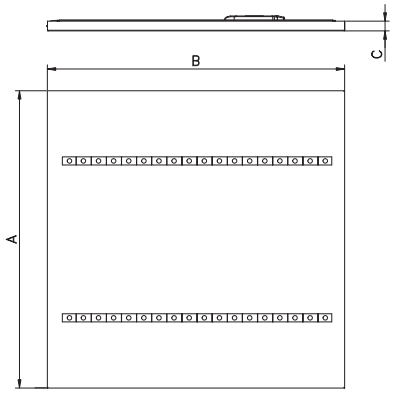

ED	W	lm (Z60, Z90, Z25AS)	Modul 600		Modul 625		C	kg
			A	B	A	B		
ED1000A /05	7	1 000	596	596	622	622	15	1,9
ED1500A / 05	10	1 300						
ED1500A /1	10	1 300						2,0
ED2000A /1	14	2 000						
ED3000A /1	19	2 700						
ED3000A /2	18	2 700						
ED4000A /2	26	3 800						
ED4000A /3	25	4 000						
ED6000A /3	38	5 800						
ED4000C /1	26	3 800	1 196	296	x	x	15	2,0

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.