
ALT

LED | 220-240V 50 Hz | DIMM | CRI 80 | IP 65


SDCM 3 | max T_a 60°C | EN 62 471 RG 0 | 80 000 L80B50

η_{ef} (lm/W) 150–180

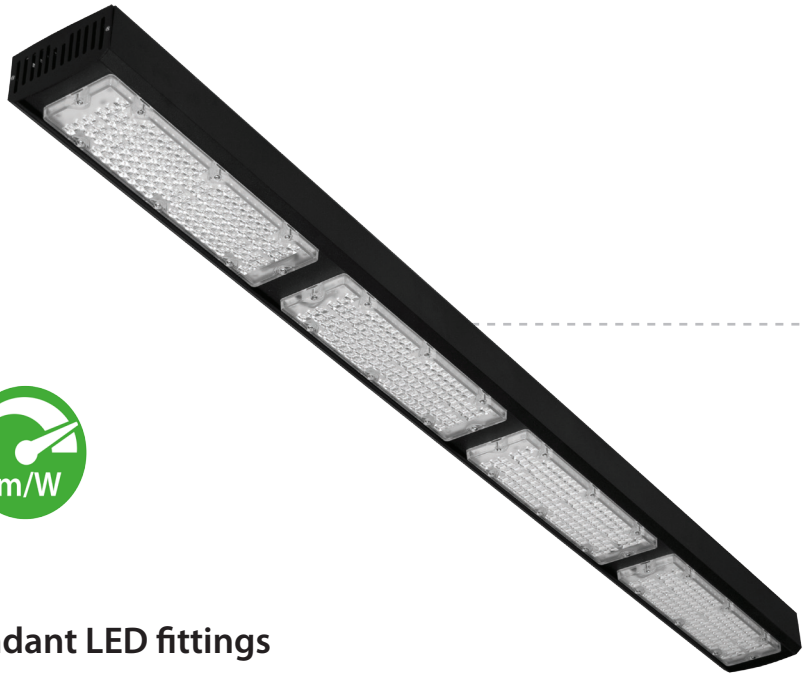


ALT

lm/W



ALT N60



ALT W90

Pendant LED fittings

Body:
Powder painted non-corressive high-pressure die-cast aluminium finished in black color, optionally in white

Optic:
Symetric glare-free optic lens
N - narrow beam 60°
W - wide beam 90°


Application:
Luminaire for indoor application

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	×	○	●	○	○	×	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	×	×	×	×	×	●

● default ○ optional × not possible



OPTIC




CONNECTOR



HINGE

Codes: ALT250M3/4W90C/ND

ALT	250	M	3	/4	W90	C	/ND
Luminaire type	Light output (x100 lm)	Body size: S – 400 mm XM – 750 mm M – 1090 mm L – 1450mm	Color temperature 3 = 3000K, 4 = 4000K, 5 = 5700K, 6 = 6500K	Nr of LED modules	Optic: N – narrow beam 60°, W – wide beam 90°	Color: C = black B = white	Driver type: ND – no dimmable DALI – dimmable DALI

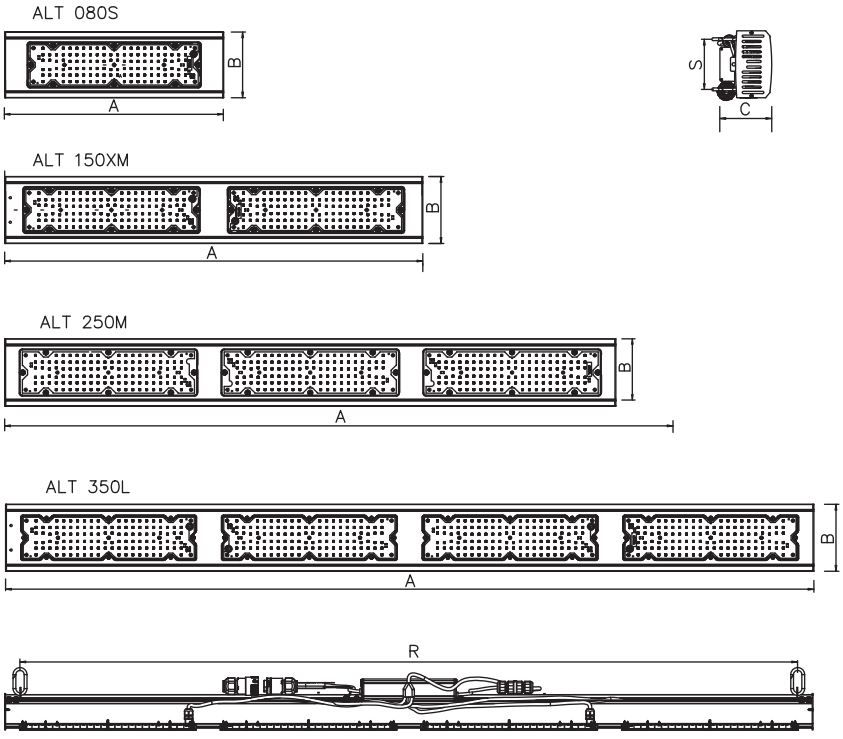

ALT	W	lm		A	B	C	R	S	kg
		W	N						
ALT 080S	46	7 700	7 400	400	120	90	345	90	3,0
ALT 150XM	88	15 500	14 900	750			695		4,5
ALT 250M	125	22 200	21 300	1090			1035		6,5
ALT 350L	182	32 800	31 500	1450			1395		9,0

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.