

CD

LED | 220 V 240 V 50-60 Hz | SDCM 3 | EN 62 471 RG 0 | IP 20 | 100 000 L70B50

η_{ef} (lm/W) 128–136



CD KN/DI

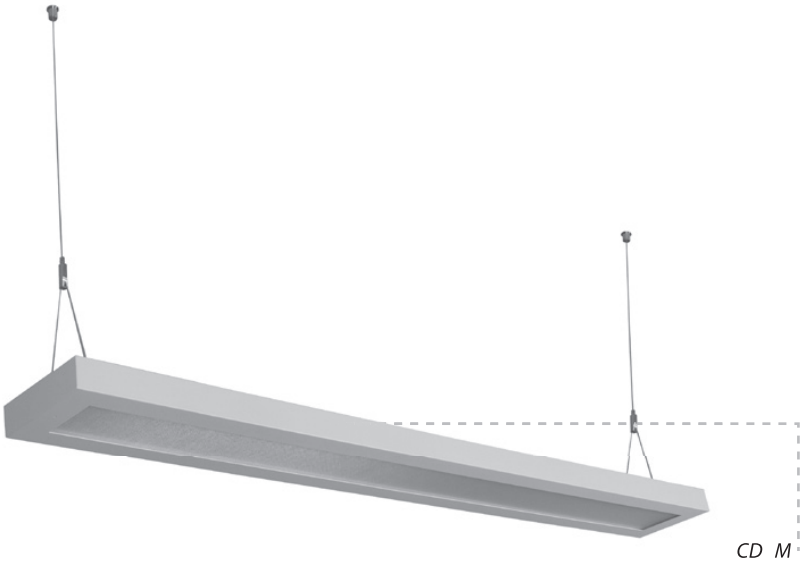

CD M

LED fittings

Body:
White or black coated metal sheet (another RAL colours available).

Optic:
KN - prismatic PS cover
KO - opal PS cover


Application:
Ceiling or pendant installation (cord suspension set included)
Using a connection part pendant luminaires can be joined to line.

Variants:
CD - single pendant luminaire, direct light distribution
CD…. /P - pendant luminaire for installation to straight row
CD…. /DI - single pendant luminaire, direct/indirect light distribution
CD…./DI/P - pendant luminaire for installation to straight row, direct/ indirect light distribution
CDP - ceiling luminaire

Accessories:
CDSPOJ/B - conection part, white (only for pendant installation)

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	×	×	×	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	○	○	○	×	×	×


● default ○ optional × not possible

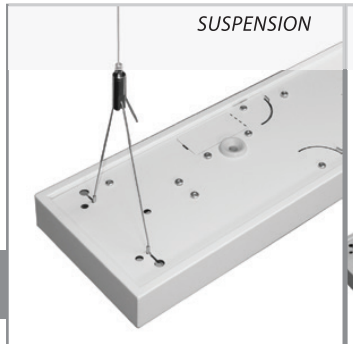

SUSPENSION



INDIRECT LIGHT UNIT

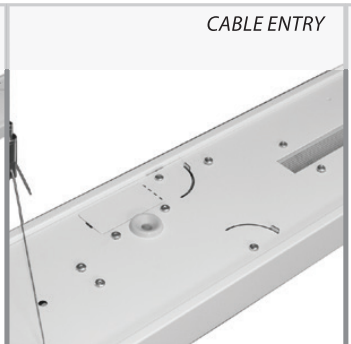


CABLE ENTRY




CDP

Codes: CD4000MKN4/DI/C/ND/P

CD	4000	M	KN	4	/DI	/C	/ND	/P
Luminaire type CD - pendant fitting CDP - ceiling fitting	Light output (lm)	Body lenght M = 1280 mm L = 1580 mm	Optic: KO - opal PS cover KN - prizmatic PS cover	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K	Version: DI = direct-indirect	Color: B = whiteRAL 9003 C = black RAL 9005 S = silver RAL 9006 A = anthracite RAL 7016	Driver type: ND - non-dimmable DALI - dimmable DALI	P = to line assembly

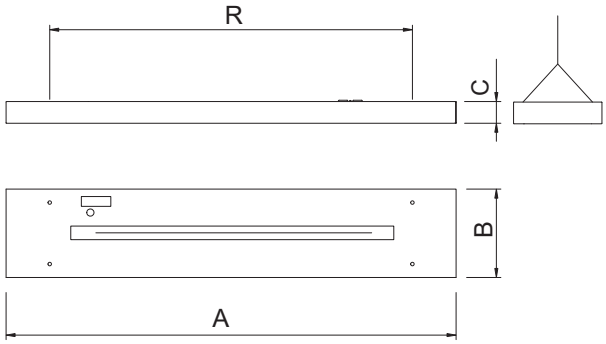

CD

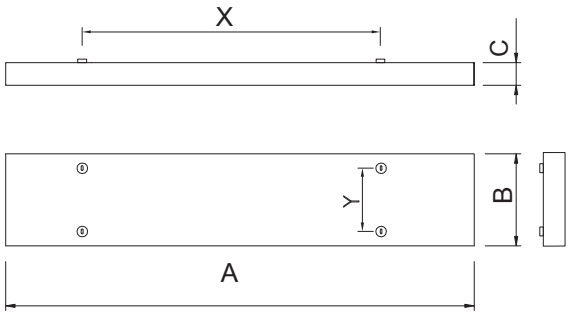

CDP

CD	W	lm		A	B	C	R	kg
		KO	KN					
CD3000M	19	2 800	2 900	1 280	154	40	1 200	4
CD4000M	28	4 000	4 200					
CD6000M	42	5 700	6 000					
CD4000L	28	3 900	4 100	1 580			1 400	5
CD5000L	36	5 000	5 300					
CD6000L	40	5 500	5 800					
CD7000L	48	6 400	6 700					

CD DI	W	lm		A	B	C	R	kg
		KO	KN					
CD4000M DI	28	4 000	4 100	1 280	154	40	1 200	4
CD6000M DI	41	5 700	5 900					
CD8000M DI	56	7 400	7 700					
CD4000L DI	28	4 100	4 200	1 580			1 400	5
CD6000L DI	41	6 000	6 200					
CD8000L DI	56	7 900	8 100					

CDP	W	lm		A	B	C	X	Y	kg
		KO	KN						
CDP3000M	19	2 800	2 900	1 280	154	40	900	110	4
CDP4000M	28	4 000	4 200						
CDP6000M	42	5 700	6 000						
CDP4000L	28	3 900	4 100	1 580			1 200		5
CDP5000L	36	5 000	5 300						
CDP6000L	40	5 500	5 800						
CDP7000L	48	6 400	6 700						

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.