

DD

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | IP 20 | EN 62 471 RG 0 | 100 000 L70B50

η_{ef} (lm/W) 137-140

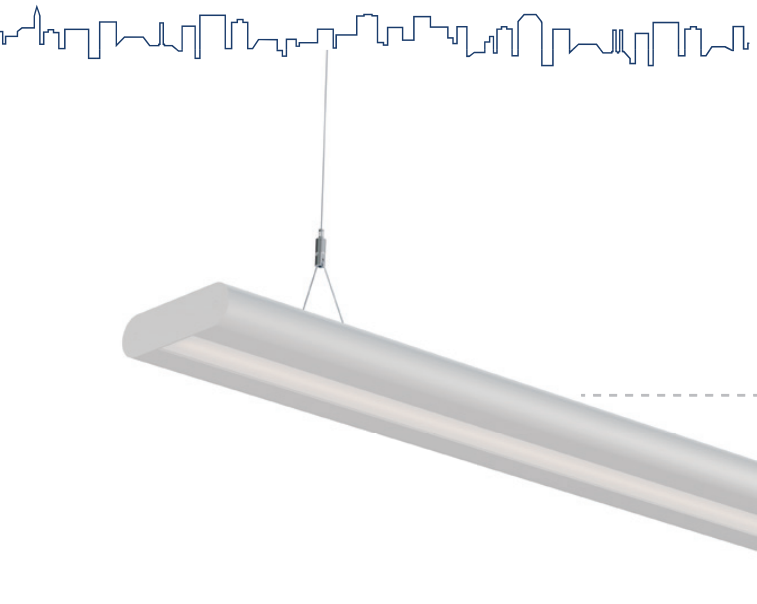



DD KO

Pendant LED fittings

Body:
Aluminium profile finished in RAL 9006, also available in white 9003 or black 9005 on request

Optic:
KO - opal cover ACRYL SATINE
KN - prismatic PS cover

Application:
Aluminium linear fittings for direct or direct/indirect light distribution.
Should be installed as pendant (pendant set included) or as surface mounted luminaire.
Intended to illumination of reprezentative work places or decorative lighting.


Variants:
DD - single pendant / surfaced luminaire, direct light distribution
DD…/DI - single pendant luminaire, direct/indirect light distribution
DD…. /R - pendant luminaire, direct/indirect light distribution to row installation


Note:
Cord suspension set included in a packing.

Accessories:
DDSPOJP - straight conection part
DDSPOJR - L shape conection part
DDSPOJT - T shape conection part
DDSPOJK - cross conection part
Connection parts do not light up

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	○	○	○	×	×	×


● default ○ optional × not possible

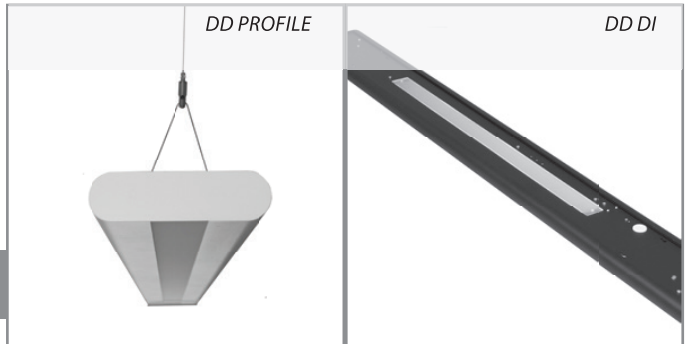

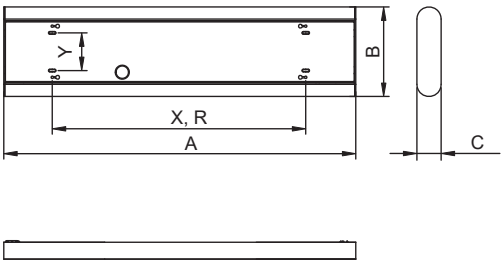


Codes: DD4000M1KO3/BDI/ND/R


DD	4000	M	1	KO	3	/BDI	/ND	/R
Luminaire type	Light output (lm)	Body lenght: M = 1186 mm L = 1486 mm	Width 1 - 166 mm	Optic: KO - cover opal KN - cover prizma	Color temperature: 3 = 3000 K 4 = 4000 K	Variant: B = white RAL 9003 C = black RAL 9005 S = silver RAL 9006 A = anthracite RAL 7016 DI = direct indirect radiation	Driver type: ND - non-dimmable DALI - dimmable DALI	/R - luminaire for row installation

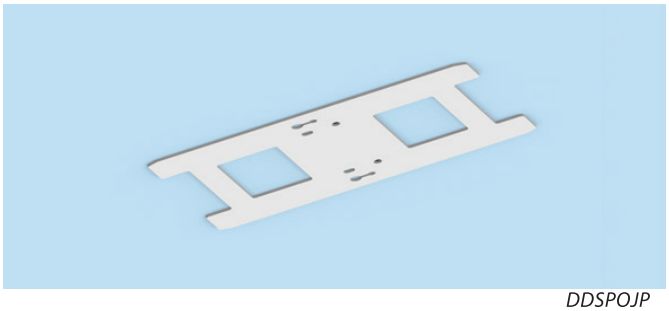


DDSPOJP

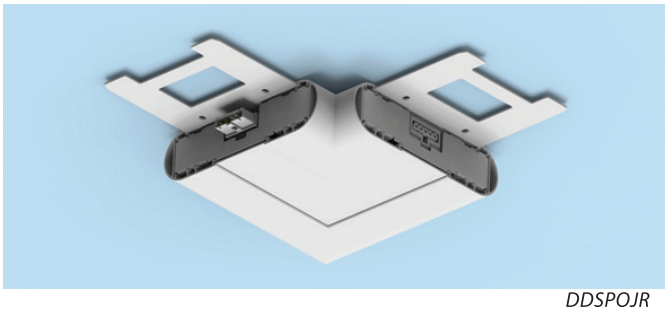

DDSPOJR

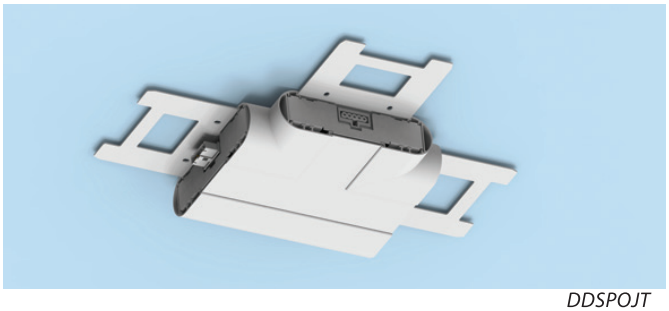

DDSPOJT

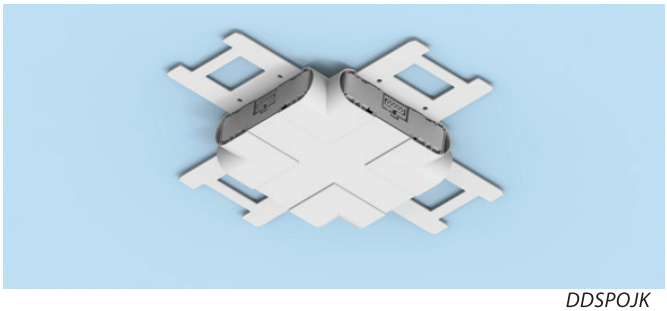

DDSPOJK

DD	W	lm	A	B	C	X	Y	R	S	kg
DD3000M1	23	3 200	1 186	166	45	820	70	820	95	3,7
DD4000M1	32	4 400								
DD3000L1	23	3 400	1 486			1 050		1 050		4,8
DD6000L1	42	5 900								
DD8000L1	56	7 700								

DD DI	W	lm		A	B	C	R	kg
		KO	KN					
DD4000M DI	36	4 800	5 000	1 186	166	45	820	3,7
DD4000L DI	35			1 486			1 050	4,8
DD6000L DI	47	6 300	6 600					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.