

DON

LED | 220 - 240 V 50-60 Hz | SDCM 3 | UGR <16 | IP 20 | EN 62 471 RG 0 | 100 000 L70B50


η_{ef} (lm/W) 127-148

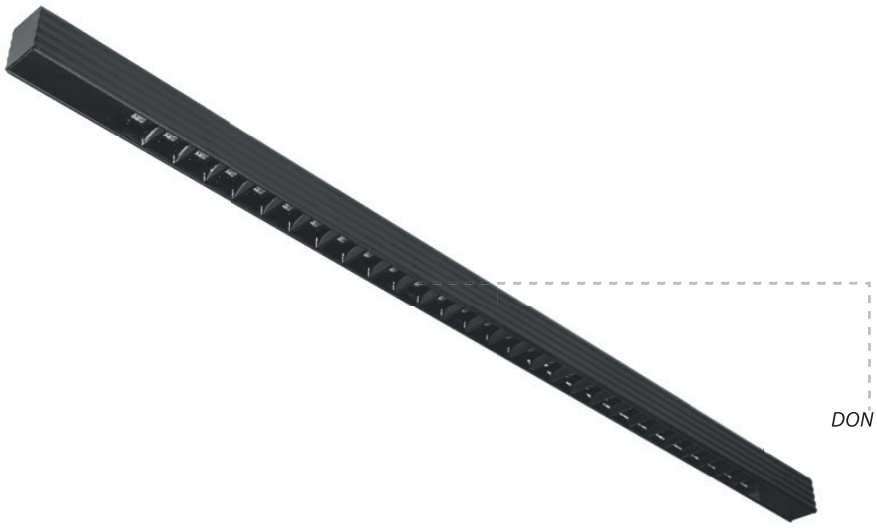

DON



DON B80



DON B50

Dark optic linear fittings

Body:
Painted aluminium profile - see page 75 for available colors

Optic:
PC reflector + clear PMMA lenses
PC reflector + clear PMMA lenses
B - white reflector - bright
B M - white reflector - mat
C - black reflector - bright
C M - black reflector - mat
50 - narrow beam 50°
80 - wide beam 80°

Versions:
DON - surfaced / pendant fitting
DONL - recessed fitting - installation into gypsum plasterboard ceiling or mineRAL ceiling - module 600
DON TR - for linear track system

Accessories:
DONZAVES - suspension set with a power cable



DON TR

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	○	○	✕	●
ON OFF	1-10V	DALI				INT	EXT	
●	✕	○	○	○	○	✕	✕	✕

● default ○ optional ✕ not possible

DONL



TERMINAL





COLOUR VARIANTS



Codes: DON1500M4CC80/ND

DON	1500	M	4	C	C80	/ND
Luminaire type DON - surface / pendant fitting DONL - recessed fitting DON TR - track system	Light output (lm)	Body lenght: S = 775 mm M = 1358 mm L = 1620 mm	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K MIX = tunable white	Body color C = black B = white G = grey A = anthracite RAL 7016	Optic B - white reflector B M - white reflector - mat C - black louvre C M - black reflector - mat 50 - narrow beam 50° 80 - wide beam 80°	Wiring: ND - non-dimmable DALI - dimmable DALI BT - bluetooth control PIR - infrared senzor

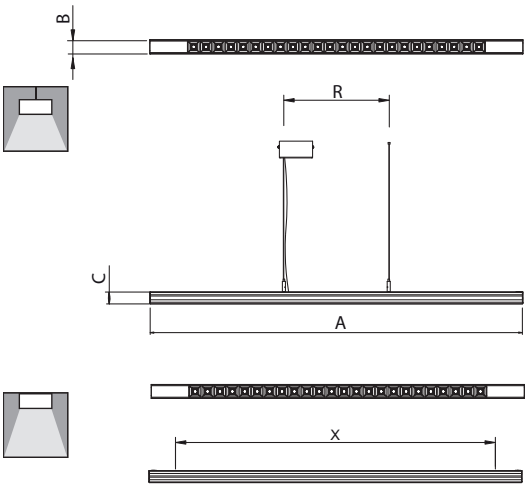

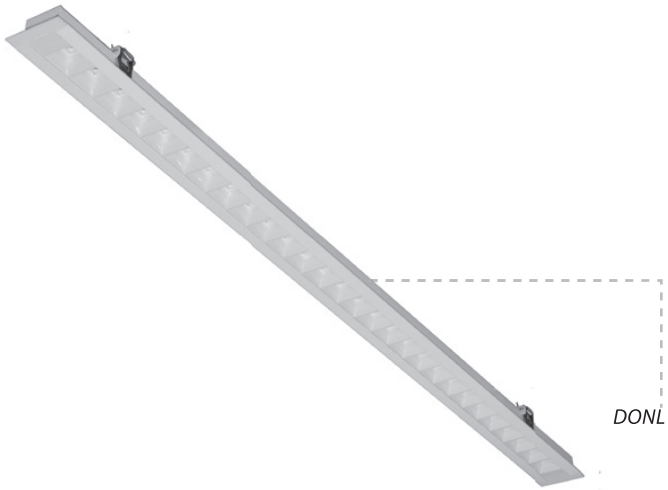

DON	W	lm		A	B	C	X	R	kg
		B50, B80	C50, C80						
DON1500 S	11	1 400	1 250	775	48	57	686	740	1,1
DON3000 S	22	3 000	2 700						
DON1500 M	11	1 600	1 450	1 358			1 276	865-1 110	1,6
DON2500 M	16	2 300	2 100						
DON3500 M	23	3 400	3 050						
DON4000 M	28	4 000	3 600						
DON5000 M	37	5 200	4 700						
DON7000 L	52	7 000	6 300	1 620			1 538	1 065-1 390	2,1

DON DI	W	lm		A	B	C	R	kg
		B50, B80	C50, C80					
DON2000M DI	21	2 600	2 300	1 144	48	63	1 070	1,6
DON4000M DI	40	4 800	4 400					
DON3000L DI	30	3 700	3 400	1 400				2
DON6000L DI	51	6 100	5 500					

DONL	W	lm		A	B	C	□	kg
		B50, B80	C50, C80					
DONL1500 S	11	1 400	1 250	596	67	45	585x60	1,2
DONL2500 M	16	2 300	2 100	1 196			1 185x60	1,8
DONL3500 M	23	3 400	3 050					
DONL4000 M	28	4 000	3 600					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.