
HEX

LED | 220 - 240 V 50-60 Hz | SDCM 3 | DIMM | IP 40 | IP 54 | UGR <19 | EN 62 471 RG 0 | 100 000 L70B50

η_{ef} (lm/W) 140-147



HEX P BC



HEX

Interior luminaress UGR<19

Body:
Black coated steel sheet.
Optional white or grey colour

Optical system:
PC reflector + clear PMMA lenses,
B – white matt reflector
C – black matt reflector
60 – beam angle 60o

Application:
For lighting representative spaces, corridors….

Variants:
HEX P = surfaced luminaire IP40
HEX D = recessed luminaire IP40
HEX D…./54 - recessed luminaire IP54
HEX P(D)…./PIR - luminaire with motion sensor

VIDEO:


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	×	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	×	○	×

● default ○ optional × not possible

FIXING CLIP



BLACK REFLECTOR





HEX D




Codes: HEX2000P3CC60/190/ND

HEX	2000	P	3	C	C	60	/190	/ND	/PIR
Luminaire type	Light output	Assembly: P = surfaced D = recessed	Color temperature: 2 = 2700 K 3 = 3000 K, 4 = 4000 K, 5 = 5700 K	Color: C – black S – silver B – white	Optic: B - white reflector C - black reflector	Optic: 60 – wide beam 60°	Diameter: 190 mm	Driver type : ND – non-dimmable DALI – dimmable DALI PIR = infrared senzor	/PIR - luminaire with motion sensor /54 - recessed luminaire IP54

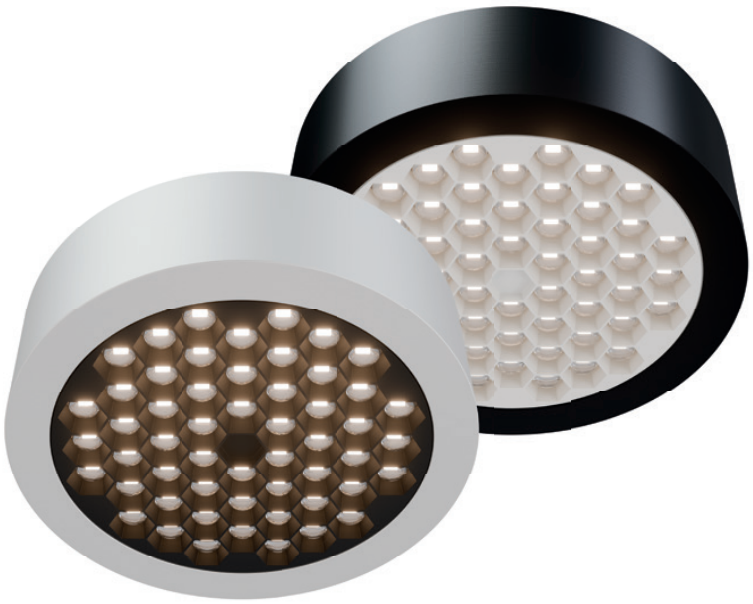

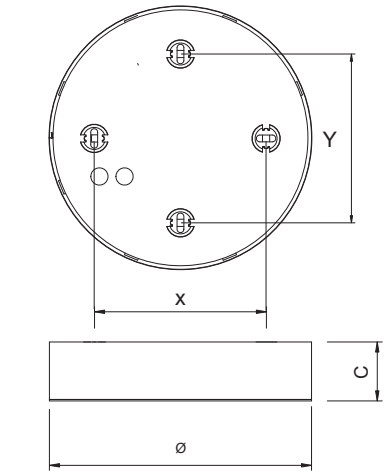

HEX P

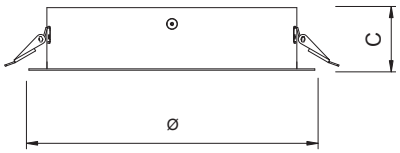

HEX D

HEX P	W	B60	C60	C	Ø	X	Y	kg
HEX1000P...	7	1 100	1 000	56	184	140	120	0,9
HEX1500P...	10	1 500	1 400					
HEX2000P...	15	2 200	2 100					

HEX D	W	B60	C60	C	Ø	□	kg
HEX1000D...	7	1 100	1 000	41	210	190	0,7
HEX1500D...	10	1 500	1 400				
HEX2000D...	15	2 200	2 100				

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.