
P





P M



P5000M


LED waterproof light fittings

Body:
PC, INOX clips

Optic:
PC - polycarbonate opal cover

Variants:
MULTI - luminaire with selectable output power
P1 - continuous assembly 3x1,5 mm²

Note:
Stainless steel brackets for both surface or pendant installation, plus 2 grommets are partpart of the lamp package.

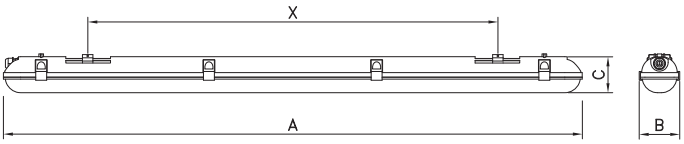


P	W	lm	A	B	C	X	kg
P5000M4NDMULTI	21 / 26 / 32 / 37	3 400 / 4 150 / 5 000 / 5 600	1 200	88	82	690 - 940	1,5
P7000L4NDMULTI	28 / 35 / 42 / 49	4 600 / 5 600 / 6 600 / 7 600	1 500			890 - 1 190	1,8

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	✕	✕	●	✕	✕	✕	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	✕	○	✕	✕	✕	✕	✕	✕

● default ○ optional ✕ not possible


BRACKET

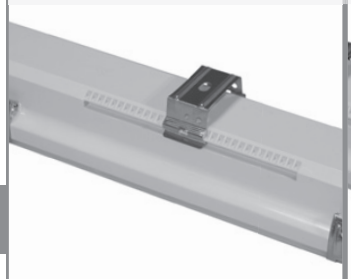

GROMMET



CLIP INOX



MULTI DRIVER

