

BC



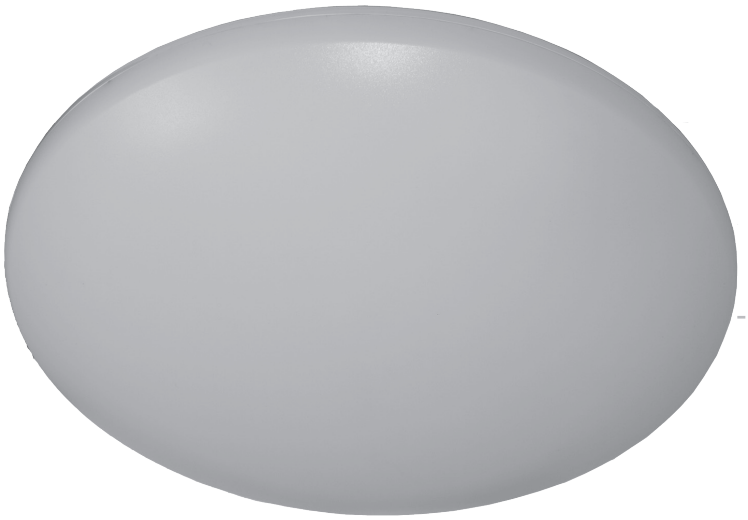

BC1000KO



BC1000KO

Surfaced LED fi ttings IP65

Body:
White painted (RAL 9003) metal sheet

Optic:
KO - opal polycarbonate cover

LED:
Mid Power LED
2…2700K
3…3000K
4…4000K

Wiring:
driver on board technology
ND – no-dimmable
DALI – dimmable DALI
BT – bluetooth control
SM – integrated active presence detector
PIR – integrated pasive presence detector

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	×	×	×	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	○	×	○	×	×	×

● default ○ optional × not possible

BC BODY



BODY - BASE




TERMINAL



Code: BC1500KO4ND

BC	1500	KO	4	ND
Luminaire type	Light output	KO – opal polycarbonate cover	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K	ND – no-dimmable DALI – dimmable DALI BT – bluetooth control SM – integrated active presence detector PIR – integrated pasive presence detector

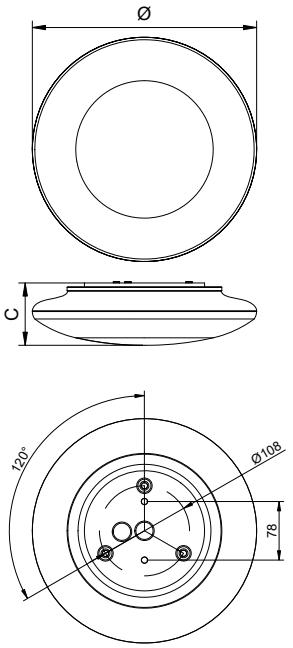

	W	lm	Ø	C	kg
BC1000KO	14	1400	300	82	1,3
BC1500KO	19	1900			
BC2000KO	23	2300			

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.