
EK

LED | 220 V 240 50-60 Hz | SDCM 3 | DIMM | IP 40 | CRI 80 | EN 62 471 RG 0 | CRI 90+ | EEC A+ | 80 000 L80B50


η_{ef} (lm/W) 109–150



EK 2000A.../1



EK KN



EK KO

Recessed LED fi tting

Body:
White painted metal sheet

Optic:
KO - opal PS cover
KN - microprizmatic PS cover

Application:
- recessed installation into modular ceilng 600 or 625 mm.
- Using accessories the panel can be also installed as surface or recessed into a gypsum plasterboard

Accessories:
UQRAM – white painted aluminium frame for surface installation
QVESTRAM – white painted aluminium frame for recessed installation into a gypsum plasterboard
NM – independent emergency module


2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	✕	○	✕	●
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	✕	○	✕

● default ○ optional ✕ not possible

EK..A..KO/2



EK..A..KO/3



LED MODULE HOLDER





OPAL COVER



Codes: EK4000A4KN600/2/ND

EK	4000	A	3	KN	600	/2	/ND
Luminaire type	Light output	Body share: A – square C – rectanglek	Color temperature: 2 = 2700K 3 = 3000K 4 = 4000K 5 = 5700K	Type optic: KO – opal polycarbonate cover KN – microprizmatic cover	Modul 600, 625	Nr. of LED modules	Driver type. ND – no dimmable DALI – dimmable DALI

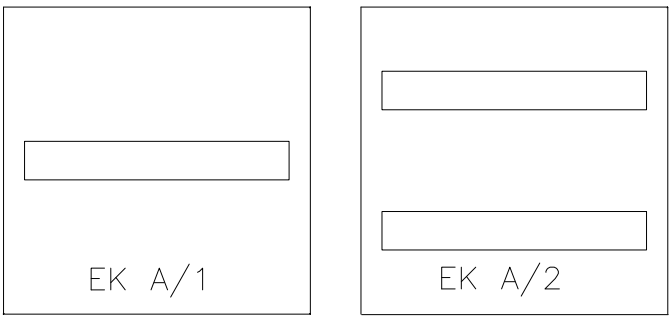

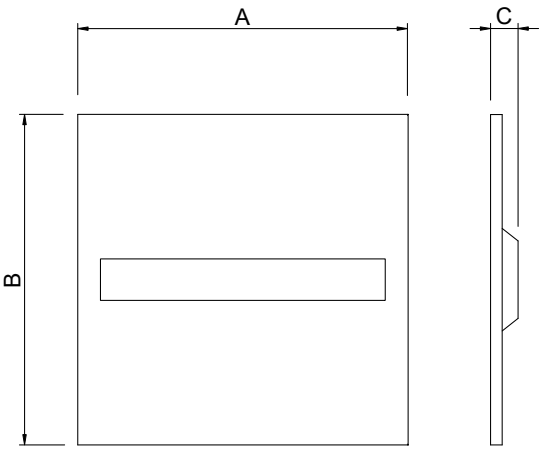

EK	W	lm		modul 600		modul 625		C	kg
		KO	KN	A	B	A	B		
EK2000 A /1/	15	1 850	1 950	595	595	622	622	35	1,8
EK3000 A /1/	20	2 500	2 650						
EK3000 A /2/	19	2 650	2 800						2,0
EK4000 A /2/	30	3 900	4 100						
EK6000 A /2/	48	5 700	6 000						
EK6000 A /3/	44	5 700	6 100						2,2
EK4000 C /1/	28	4 000	4 200	1 196	296	1245	310		2,0
EK6000 C /1/	51	5 600	5 900						

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.