
EPC

LED | 220 V 240 50-60 Hz | DIMM | IP 20 | CRI 80 | CRI 90+ | EN 62 471 RG 0 | UGR <19 | EEC A+ | 80 000 L80B50


η_{ef} (lm/W) 146–154



EPC SS



EPC Z60



EPC Z90

LED light fittings

Body:
White painted (RAL 9003) metal sheet

Optic:
Symetric linear PMMA lenses
Z60 – narrow beam 60°
Z90 – wide beam 90°


Application:
Surface installation using magnetic holders (part of the package)
Pendant installation using suspension set (extra accessories)
ZH/UNI2 - fittings EPC RS
ZH/UNI4 - fittings EPC SS

Accessories:
ZH/UNI2 – universal 2-wires suspension
ZH/UNI4 – universal 4-wires suspension

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	×	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	○	×	×

● default ○ optional × not possible

MAGNETIC HOLDER RS



MAGNETIC HOLDER SS



ZH/UNI2





OPTIC





Codes: EPC4000RS3Z60/1/ND

EPC	4000	R	S	3	Z60	/1	/ND	
Luminaire type EPC - central optic	Light output	Body shape R – rectangle S – square	body lenght: S = cca 600 mm	Color temperature 2 = 2700K 3 = 3000K 4 = 4000K 5 = 5700K	Optic: Z60 – narrow 60° Z90 – wide 90°	Nr of LED modules	Driver type: ND – no dimmable DALI – dimmable DALI	





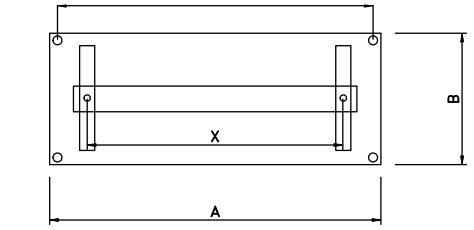

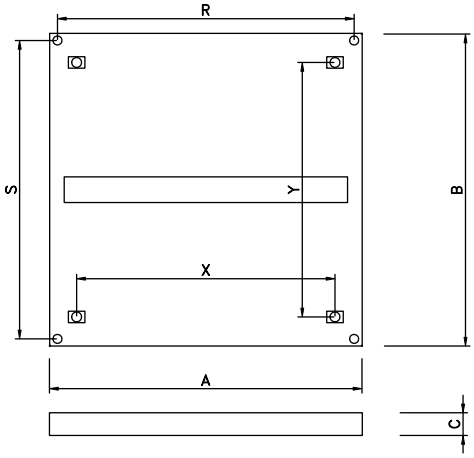

	W	lm (Z60, Z90)	A	B	C	X	Y	R	S	kg
EPC2000 RS /1	13	2 000	655	225	40	500	-	630	-	1,2
EPC3000 RS /1	18	2 700								
EPC4000 RS /1	24	3 500								
EPC2000 SS /1	13	2 000	595	595			500	572	572	2,0
EPC3000 SS /1	18	2 700								
EPC4000 SS /1	24	3 500								

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.