

EPK

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | IP 40 | CRI 80 | EN 62 471 RG 0 | CRI 90+ | EEC A+ | 80 000 L80B50


η_{ef} (lm/W) 109–150

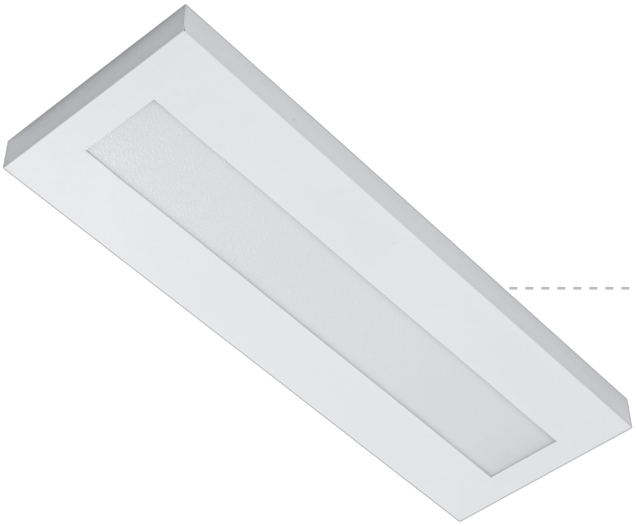

EPK RS



EPK KN



EPK KO

LED light fittings

Body:
White painted (RAL 9003) metal sheet

Optic:
KO - opal PS cover
KN - microprizmatic PS cover

Application:
Surface installation using magnetic holders (part of the package)
Pendant installation using suspension set (extra accessories)
ZH/UNI2 - fittings EPK RS
ZH/UNI4 - fittings EPK SS

Accessories:
ZH/UNI2 – universal 2-wires suspension
ZH/UNI4 – universal 4-wires suspension

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	○	×	×

● default ○ optional × not possible



MAGNETIC HOLDER



ZH/UNI2



OPAL COVER




DRIVER


Codes: EPK4000RS3KN/1/ND

EPK	4000	R	S	3	KN	/1	/ND
Luminaire type	Light output	body shape: R – rectangle S – square	body lenght: S = cca 600 mm M = cca 1200 mm L = cca 1500 mm	Color temperature 2=2700, 3=3000K, 4=4000K, 5=5700K	Optic: KO - opal PS cover KN - microprizmatic PS cover	Nr of LED modules	Driver type: ND – no dimmable DALI – dimmable DALI







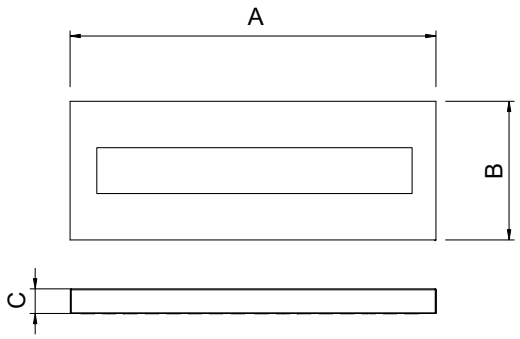

EPK	W	lm		A	B	C	X	Y	kg
		KO	KN						
EPK2000 RS /1/	15	1 850	1 950	655	225	40	500	-	0,8
EPK2000 SS /1/	15	1 850	1 950	595	595			500	2,0
EPK3000 SS /1/	20	2 500	2 650						
EPK3000 SS /2/	19	2 650	2 800						
EPK4000 SS /2/	30	3 900	4 100						
EPK6000 SS /2/	48	5 700	6 000						
EPK4000 RM /1/	28	4 000	4 200	1 230	225		1 140	-	
EPK6000 RM /1/	51	5 600	5 900						
EPK4000 RL /1/	34	4 200	4 400	1 535			1 300		2,6
EPK6000 RL /1/	46	5 500	5 800						

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.