

ESD

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | EN 62 471 RG 0 | IP 20 | CRI 80 | EEC A+ | 80 000 L80B50


η_{ef} (lm/W) 104–133

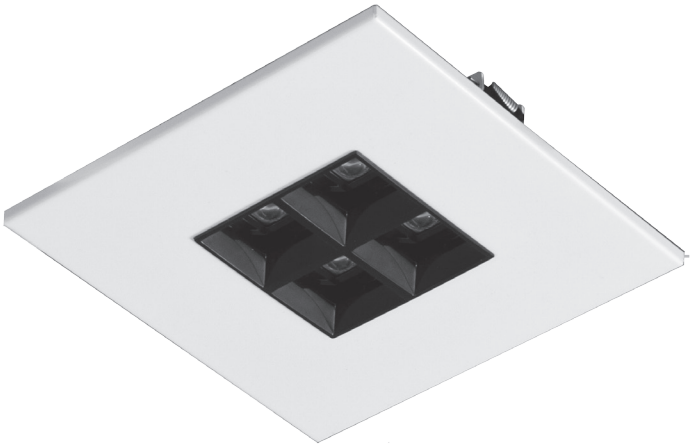

ESD



ESD B50



ESD B80

Recessed LED downlight

Body:
White (black) painted metal sheet

Optic:
PC reflector + clear PMMA lenses
B50 - white reflector with lenses 50°
B80 - white reflector with lenses 80°
C50 - black reflector with lenses 50°
C80 - black reflector with lenses 80°

Application:
- recessed installation.

Accessories:
NM – independent emergency module

ESD	W	lm		A	B	C	□	kg
		B50, B80	C50, C80					
ESD1000	9	1 200	1 100	180	180	45	160x160	1,0
ESD1500	14	1 600	1 450					

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	✕	✕	✕	●
ON OFF	1-10V	DALI				INT	EXT	
●	✕	○	○	✕	✕	✕	○	✕

● default ○ optional ✕ not possible

OPTIC MODUL



