

ESO




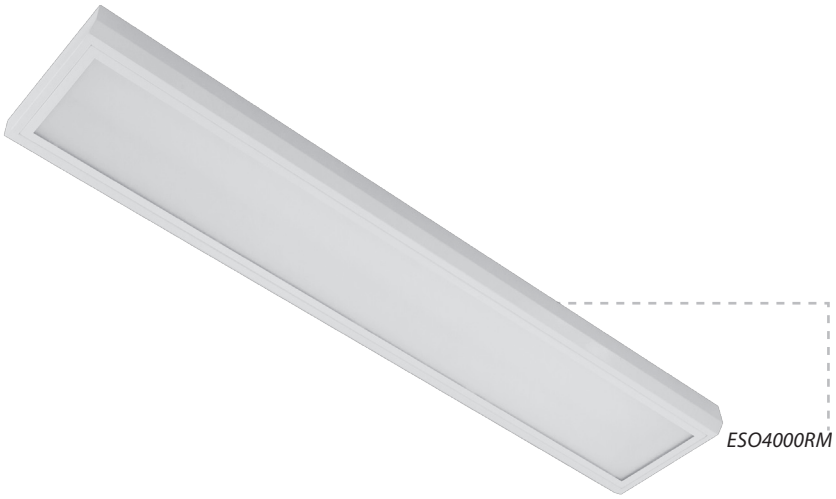

ESO4000RM



ESO KN



ESO KO

LED fitting


Body:
White painted (RAL 9016) metal sheet

Optic:
KN – clear PS microprizmatic cover
KO – opal PS cover

Application:
Default way of using is a surface installation. Using suspension set ZH/UNI4 also pendant installation is possible.


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	×	○	○	×	×

● default ○ optional × not possible

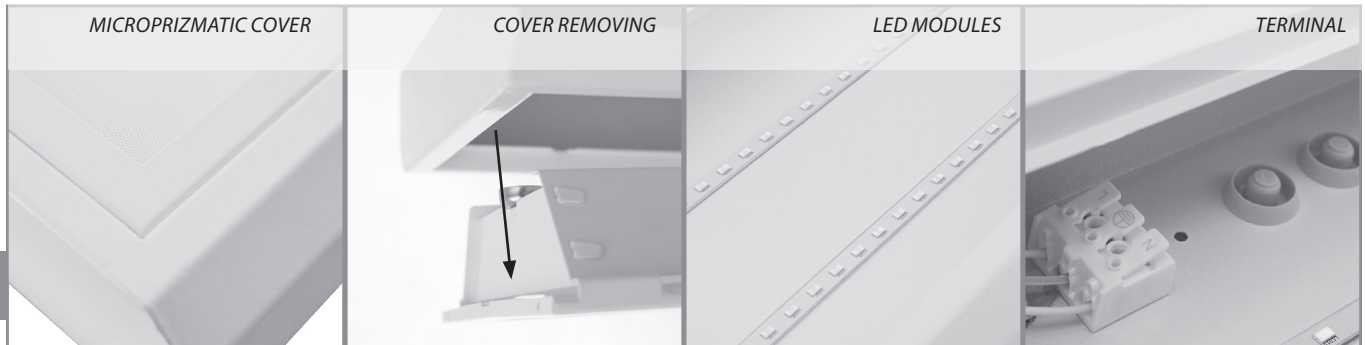


Codes: ESO4000RMKN3ND

ESO	4000	R	M	KN	3	ND
Luminaire type	Luminaire light output lm	body shape: R – rectangle S – square	body lenght: S = 600 mm M = 1200 mm L = 1500 mm	Cover type: KN – microprizma KO – opal	Color temperature 3 = 3000K, 4 = 4000K, 5 = 5700K	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI

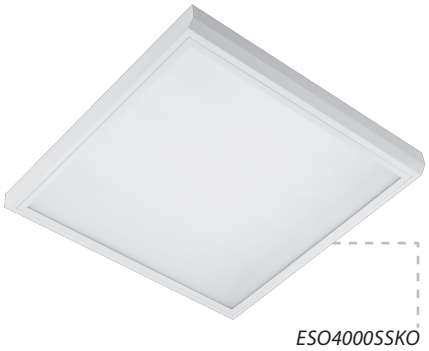

ESO4000SSKO

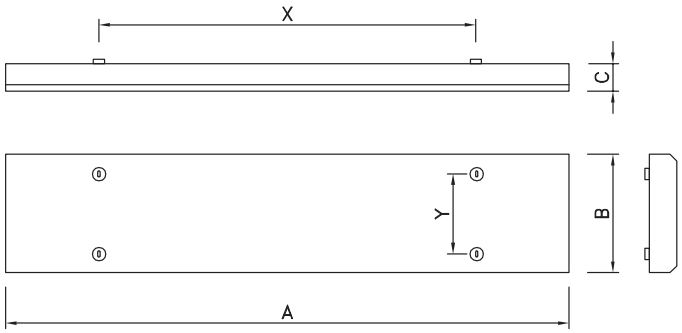

ESO	W	lm		A	B	C	X	Y	kg
		KO	KN						
ESO2000 RS	20	2 200	2 300	610	240	52	500	150	2,5
ESO3000 SS	23	3 000	3 200	560	560		400	400	4,0
ESO4000 SS	36	4 300	4 800						
ESO6000 SS	55	6 300	6 600						
ESO3000 RM	26	3 300	3 500	1 210	240		950	150	4,5
ESO4000 RM	38	4 400	4 600						
ESO5000 RL	44	5 000	5 900	1 510			1 200		5,5
ESO6000 RL	57	7 200	7 500						

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.