
FIT

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | EN 62 471 RG 0 | UGR <19 | IP 20 | IP 40 | CRI 80 | CRI 90+ | EEC A+ | 80 000 L80B50


η_{ef} (lm/W) 109–140



FIT A



FIT KN



FIT KO

LED panel

Body:
White painted (RAL 9003) aluminium frame

Optic:
Transluce acrylic desk
KO – opal cover
KN – microprizmatic cover

Version (body shape)
FIT..A 600 (625) – square 600x600 mm (625x625)
FIT..B 600 – rectangle 600x300 mm
FIT..C 600 – rectangle 1200x300 mm

Installation way:
FIT – recessed installation into modular ceilng 600 or 625 mm. Using accessories the panel can be also installed as surface or recessed into a gypsum plasterboard.
FITP – surface or recessed installation into modular ceilng 600 or 625 mm. Using accessories the panel can be also UNI 2 installed as pendant or recessed into a gypsum plasterboard

Accessories:
UQRAM – white painted aluminium frame for surface installation
ZH/UNI2 - universal 2-wires suspension
QVESTRAM – white painted aluminium frame for recessed installation into a gypsum plasterboard
51009913 – magnetic holder for surface installation on a gypsum plasterboard
VESTRAMA600 – white painted metal frame for recessed installation of QN or QPN into gypsum plasterboard ceiling
NM – independent emergency module
VESTSET – set of clips for recessed installation of QN or QPN into modular ceiling with hidden profiles


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	○	○	○

● default ○ optional × not possible




Codes: FIT4000A3KN600/ND

FIT	4000	A	3	KN	600	/ND
Luminaire type FIT - recessed / pendant fitting FITP recessed / surface / pendant fitting"	Light output	Body shape A - square - 600x600 mm B - rectangle - 600x300 mm C – rectangle - 300x1200 mm	Color temperature 3 = 3000K, 4 = 4000K, 5 = 5700K	Cover type: KN –microprizma KO – opal	Modul 600 625	Driver type: ND – no dimmable DALI – dimmable DALI

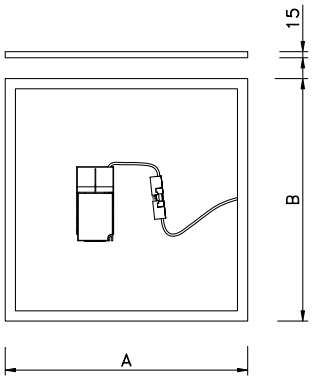

FIT



FITP

FIT	W	lm		modul 600		modul 625		kg
		KO	KN	A	B	A	B	
FIT3000A	24	3 000	3 100	596	596	622	622	5,0
FIT4000A	35	4 400	4 500					
FIT5000A	49	5 500	5 700					
FIT6000A	57	6 300	6 600					
FIT2000B	16	1 950	2 000	596	296	622	310	2,8
FIT4000B	35	3 800	4 000					
FIT4000C	35	4 100	4 200	1196	296	1245	310	5,0
FIT6000C	57	6 200	6 400					
FIT3000A / 90	24	x	2 650	596	596	622	622	
FIT4000A / 90	35	x	3 950					
FIT5000A / 90	49	x	5 000					
FIT6000A / 90	57	x	5 650					

FIT EFFI	W	lm		modul 600		modul 625		kg
		KO	KN	A	B	A	B	
FIT3500A	27	3 700	3 800	596	596	622	622	5,0
FIT4500A	35	4 800	4 900					

FITP	W	lm		modul 600		modul 625		X/R	Y/S	kg
		KO	KN	A	B	A	B			
FITP3000A	24	3 000	3 100	596	596	622	622	170	170	5,3
FITP4000A	35	4 400	4 500							
FITP5000A	49	5 500	5 700							
FITP6000A	57	6 300	6 600							
FITP4000C	35	4 100	4 200	1196	296	1196	310	410	90	
FITP6000C	57	6 200	6 400							

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.