
IBP






IBP A



IBP KO



IBP KN

Recessed LED fittings

Body:
White painted (RAL 9016) metal sheet

Optic:
KO - opal PS cover
KN - microprizmatic PS cover
HO - smooth opal PS cover
PCO - opal PC cover

Application:
- Recessed - lighting for installation into false ceiling with visible supporting structure (both 600x600 or 625x625 modules).
- Installation into a gypsum plasterboard ceiling can by done with a QVESTRAM frame.

Versions:
600 – for 600 module
625 – for 625 module
IBS - light fitting with a decorative cover - see page 162

Accessories:
QVESTRAM - a frame for recessed installation into gypsum plasterboard ceiling
RAM100 - aluminium frame for surface installation

Note:
IP54 protection only from bottom side after installation

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	×	×	○	×	○

● default ○ optional × not possible



COVER IP54




TERMINAL



CLOSED TERMINAL

Codes: IBP4000A3KO600ND

IBP	4000	A	3	KO	600	ND
Luminaire type	Light output	Body shape A - square - 600x600 mm C – rectangle - 300x1200 mm	Color temperature 3 = 3000K, 4 = 4000K, 5 = 5700K	Cover type: KO – opal KN – microprizma HO - smooth opal PS cover PCO - opal PC cover	Modul 600 625	Driver type: ND – no dimmable DALI – dimmable DALI

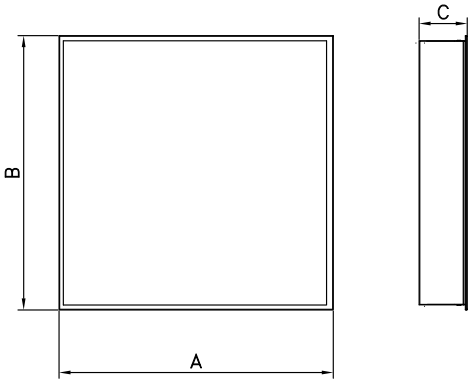

IBP	W	lm		modul 600		modul 625		C	kg
		KO	KN	A	B	A	B		
IBP3000A	23	3 100	3 200	596	596	622	622	90	2,6
IBP4000A	32	4 100	4 200						
IBP5000A	44	5 000	5 100						
IBP6000A	55	6 500	6 900						
IBP2000B	19	1 950	2 050	596	296	x	x		1,9
IBP3000C	23	2 900	3 000	1196	296				2,8
IBP4000C	32	3 900	4 000						
IBP6000C	57	6 500	6 900						

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.