

KSL



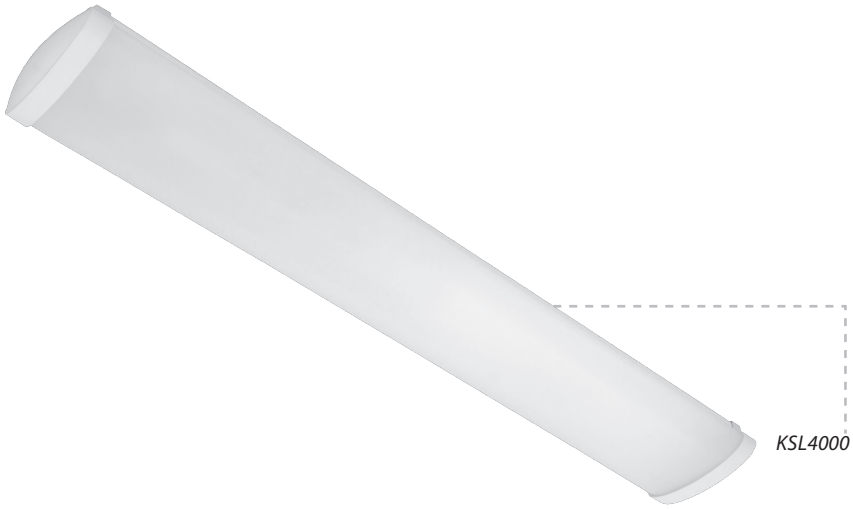

KSL4000



KSL

LED fittings with cover

Body:
White painted (RAL 9016) metal sheet
White plastic endcaps

Optic:
KS - semiopal PMMA cover

Application:
These light fittings can be used as surface mounted or suspended.
- for shops, schools, social, sports and living spaces

Accessories:
Protection grid - OM
ZH/UNI4 – universal 4-wires suspension

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	○	○	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	○	✕	✕

● default ○ optional ✕ not possible

BASE AND END CUP




COVER REMOVAL




Codes: KSL4000M3KS/ND

KSL	4000	M	3	KS	/ND
Luminaire type	Light output	Body lenght S = 600 mm M = 1200 mm L = 1500 mm	Color temperature: 3 = 3000K, 4 = 4000K	Cover type: KS = semiopal	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI

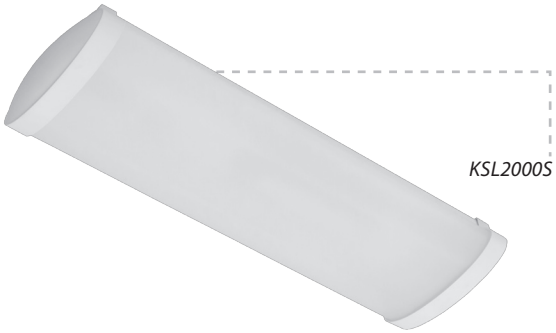

KSL2000S

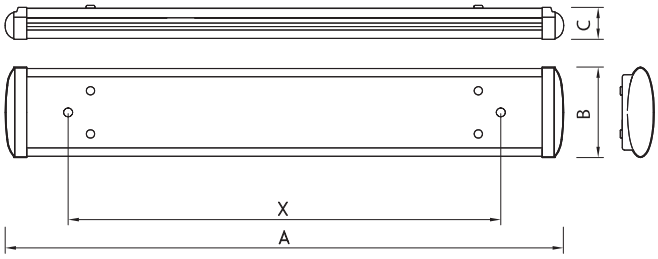

	W	lm	A	B	C	X	kg
KSL2000 S	21	2 500	683	208	77	540	2,2
KSL2000 M	20	2 500	1293			1150	2,6
KSL4000 M	41	5 000					
KSL8000 M	65	7 500					
KSL3000 L	30	4 400	1593			1450	3,1
KSL6000 L	51	7 300					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.