

KX



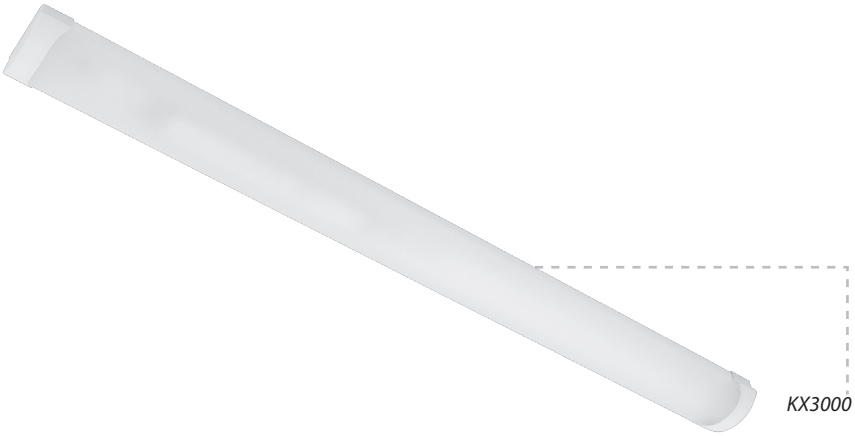



KX

LED fittings with cover

Body:
White painted metal sheet
White plastic endcaps

Optic:
KO - opal PMMA cover
KMO - MAT opal PMMA


Application:
These light fittings can be used as surface mounted or suspended.
- for shops, schools, social, sports and living spaces

Accessories:
Protection grid - OM
ZH/UNI4 – universal 4-wires suspension


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	×	○	○	×	×

● default ○ optional × not possible

END CAP



COVER REMOVAL




TERMINAL



Codes: KX5000M3KO/ND

KX	5000	M	3	KO	/ND
luminaire type	Light output	body lenght: S = 600 mm M = 1200 mm L = 1500 mm	Color temperature 3 = 3000K, 4 = 4000K, 6 = 6500K	Cover type: KO = opal KM = matopal	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI

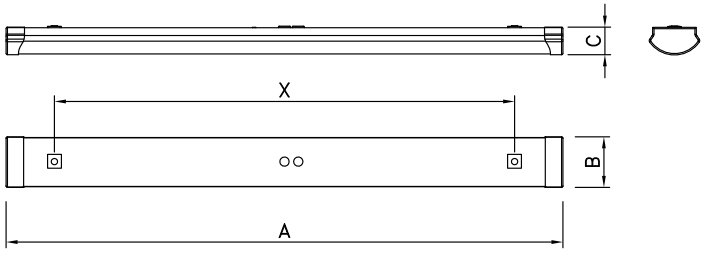

	W	lm	A	B	X	C	kg
KX2000 SKO	20	2 500	630	110	498	60	1,8
KX4000 SKO	34	4 200					
KX3000 MKO	18	2 600	1210		1000	60	2,5
KX4000 MKO	25	3 800					
KX5000 MKO	36	5 400					
KX3000 LKO	22	3 300	1500		1200		3
KX6000 LKO	47	6 900					
KX8000 LKO	58	8 200					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.