

LLLX



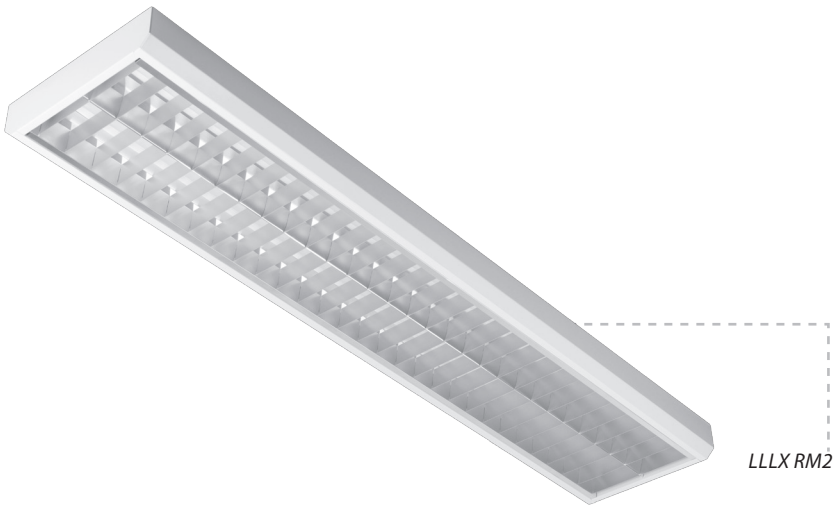

LLLX RM2



LLLX MAT

LED luminaires with optic system

Body:
White painted (RAL 9003) metal sheet

Optic:
MAT – mat aluminium louvre

Application:
-surface or pendant installation
- these LED fittings are recomended for offices, for lighting areas with requirements for light and glare control.


2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	✕	○	●	✕	✕	✕	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	✕	○	✕	✕	✕	○	✕	✕

● default ○ optional ✕ not possible

	w	lm	A	B	C	X	Y	kg
LLLX4000 RM2 MAT ND	37	4 000	1258	264	60	950	180	2,5
LLLX6000 RL2 MAT ND	57	6 200	1558			1250		3,2

lm - luminaire light output

MOUNTING HOLES



LOUVRE DETAIL



