
LV LEDOS AS

LED | 220 V 240 V 50-60 Hz | DIMM | IP 65 | IK 08 | CRI 70 | EEC A+ | EN 62 471 RG 0 | 100 000 L70B50

η_{ef} (lm/W)
125



LVLEDOS AS



LVLEDOS AS


Pedestrian crossing lighting fixtures

Body:
High quality aluminium body finnished in grey colour, steinless clips

Optic:
AS - asymetric optic
Tempered 4 mm glass cover

Wiring:
ND – not dimmable
3DIM – dimmable driver OSRAM 4DIM

Application:
Optimal for 5-8 m posts.

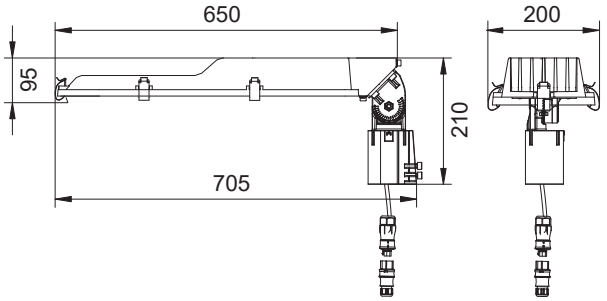

LV LEDOS AS	W	lm	kg
LVLEDOSAS5000	56	7100	7

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	✕	✕	○	●	✕	✕	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	✕	✕	✕	✕	✕	✕	✕	●

● default ○ optional ✕ not possible

