
NAR

LED | 220 V 240 V 50-60 Hz | SDCM 3 | IP 20 | CRI 80 | EEC A+ | EN 62 471 RG 0 | 80 000 L80B50


η_{ef} (lm/W)
141




NAR



Z60



Z90



AS


Linear fittings with optic


Body:
White or black painted metal sheet

Optic:
Clear PMMA optic
Z60 – narrow beam 60°
Z90 – wide beam 90°
ZAS – asymetric

Application:
Surface or pendant installation

Accessories:
NARZAVES - suspension set with a power cable

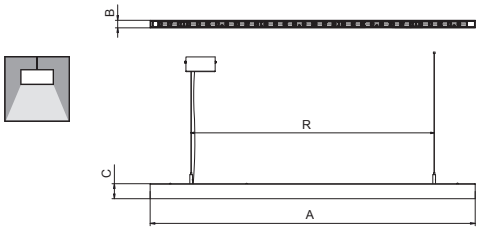



	W	lm	A	B	C	R	X	kg
NAR2000S	13	1900	630	28	55	570	560	2,0
NAR4000M	27	3 800	1190			890	1090	2,5

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	○	✕	✕	●
ON OFF	1-10V	DALI				INT	EXT	
●	✕	○	○	✕	✕	✕	✕	✕

● default ○ optional ✕ not possible

