
OXC

LED | 220 V 240 V 50-60 Hz | IP 65 | IK 08 | CRI 80 | EEC A+ | 40 000 L70B50 | EN 62 471 RG 0

η_{ef} (lm/W) 122–123



OXC



OC


Outdoor LED fitting

Body:
Black (RAL9005) painted aluminium sheet


Optic:
clear glass
PC - clear polycarbonate

Application:
Outdoor fitting for general using

Note:
V60 – flange for bracket 60 mm
S60 –flange for post 60 mm

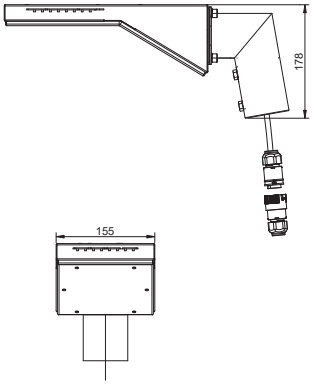

OC	W	lm
OXC2000	18	2200
OXC3000	26	3200

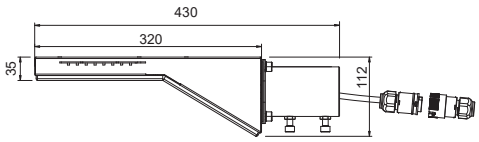

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	✕	✕	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	✕	✕	✕	✕	✕	✕	✕	●

● default ○ optional ✕ not possible



OXC V60



OXC S60



OPTIKA OXC

OXC V60



OXC S60

