

PHD



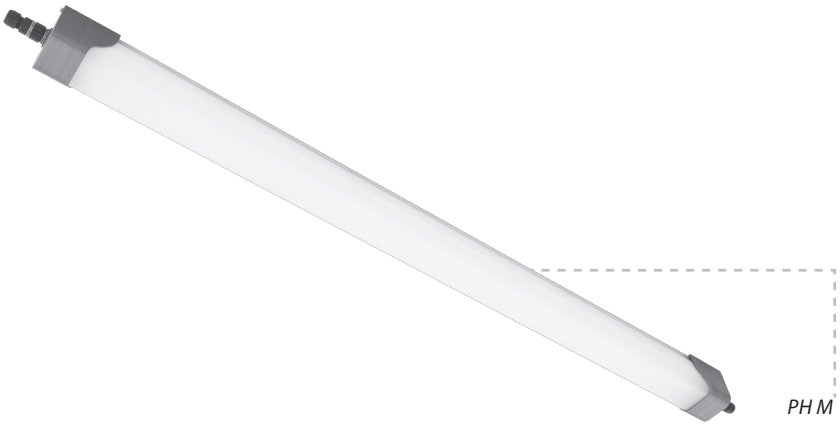



LED waterproof fittings

Body:
Polycarbonate or PMMA body
White painted stell base
Polycarbonate or PS endcaps

Optic:
PC – semiopal polycarbonate
PM – semiopal PMMA

Application:
Surface mounted or suspended, assembly accssories included

Accessories:
ZH / UNI4 - universal 4-wire suspension
PH / PK / ND… .for R version - contains counterpart to input connector + plug to output connector

Possible versions:
PHD / S for solo installation, includes input connector with counterpart
PHD / P1 for continuous installation (the luminaires are interconnected by a cable), includes input connector with counterpart + output connector with counterpart
PHD / R1 for continuous connection (the fixtures are connected one after the other) , includes input connector + output connector


PHD	W	lm	A	B	C	X/R max	kg
PHD3000S	20	2 600	710	75	78	400	1,6
PHD5000M	37	5 400	1310			1000	2,0
PHD7000L	53	7 800	1610			1300	2,5

lm - luminaire light output


2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	✕	○	●	○	○	✕	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	✕	✕	✕	✕	●

● default ○ optional ✕ not possible

INPUT CONNECTOR



CONNECTION

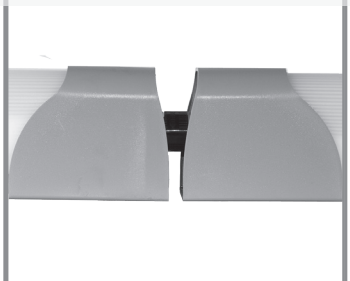

FIXING CLIP

