

QN

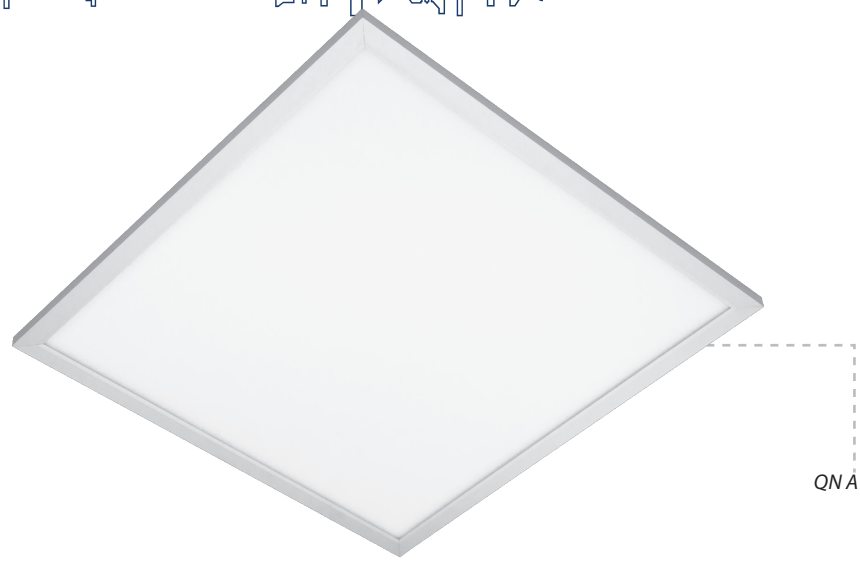

QN A



QN

η_{ef} (lm/W)
92–121

LED panel

Body:
Elox aluminium frame, also available in white on request

Optic:
Translucent acrylic layer + microprizmatic cover


Version (body shape):
QN..A – square „600x600"
QN..B – rectangle „600x300"
QN..C – rectangle „1200x300"

Installation way:
QN - insulation class II, for recessed installation into a raster ceiling 600x600 mm or 625x625 mm. Using accessories the panels can be also installed as pendant, surface or recessed into gypsum plasterboard.
QPN - insulation class I, for surface installation or recessed installation into raster ceiling. Using set ZH/UNI4 the panels can be suspended.

Accessories:
ZH/UNI4 - universal 4-wires suspension
UQRAM - a frame for surface installation of QN panels
QVESTRAM - a frame for recessed installation of QN or QPN into gypsum ceiling
51009913 - magnetic holder for surface instalation on gypsum ceiling of QN panels 4pcs for a panel type A, B, C or E, 6pcs for a panel type D or F)
NM – independent emergency module
VESTSET – set of clips for recessed installation of QN or QPN into modular ceiling with hidden profiles


2200	2700	2900	3800	5300	6200	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	×	○	○	○

● default ○ optional × not possible

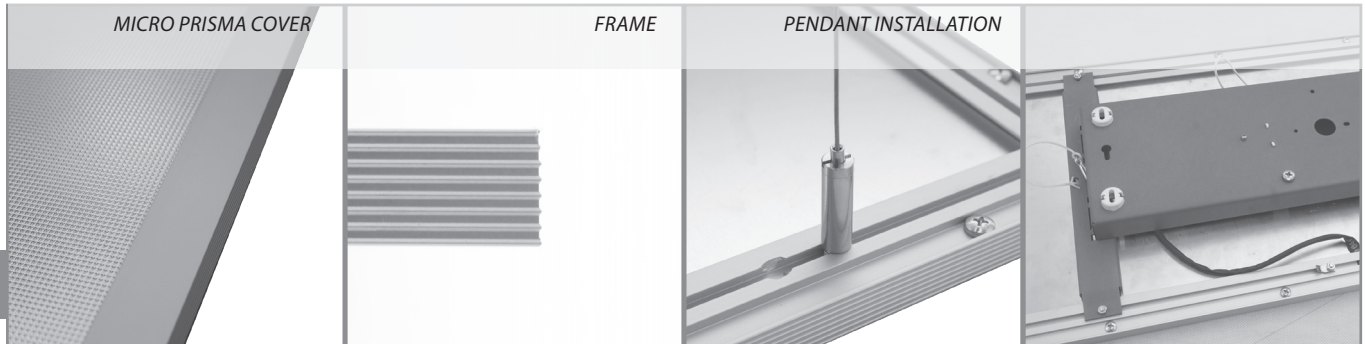

Codes: QN3A600/700ND

QN	3	A	600	/700ND	/90
Type: QN - recessed / pendant fitting QPN – recessed / surface / pendant fitting"	Color temperature 2 = 2900K, 3 = 3800K, 5 = 5300K	Body shape A - square - 600x600 mm B – ectangle – 300x600 mm C – ectangle - 300x1200 mm	Modul: 600, 625	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI	

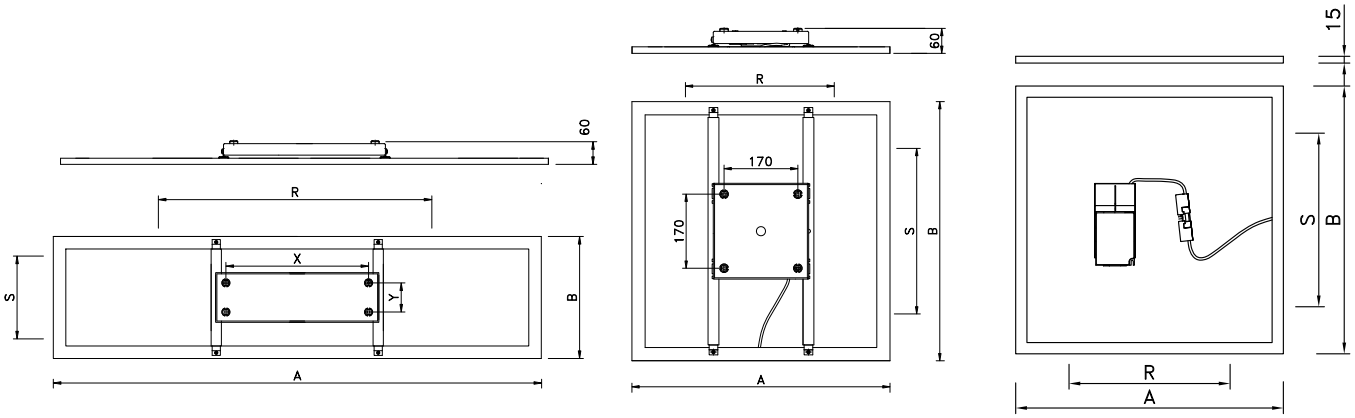

QPN C *QPN A* *QN A*

	W	lm	600				625				kg
			A	B	R	S	A	B	R	S	
QN A/700	34	4 100	596	596	200-530	555	622	622	200-555	580	4,2
QN A/1050	52	5 800									
QN B/350	17	1 750		296		255	X	X	X	X	
QN B/500	26	2 500									
QN C/700	35	4 000	1196		450-900						4,4
QN C/1050	54	5 600									

Ra 90	W	lm	600				625				kg
			A	B	R	S	A	B	R	S	
QN A/700/90	34	3 400	596	596	200-530	555	622	622	200-555	580	4,2
QN A/1050/90	52	4 800									

	W	lm	600						625						kg
			A	B	X	Y	R	S	A	B	X	Y	R	S	
QPN A/700	34	4 100	596	596	170	170	200-530	555	622	622	170	170	200-550	580	4,2
QPN A/1050	52	5 800													
QPN B/350	17	1 750		296	300	90	200-530	255	X	X	X	X	X	X	
QPN B/500	26	2 500													
QPN C/700	35	3 900	1196		410		450-900								4,4
QPN C/1050	54	5 600													

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.