


Q

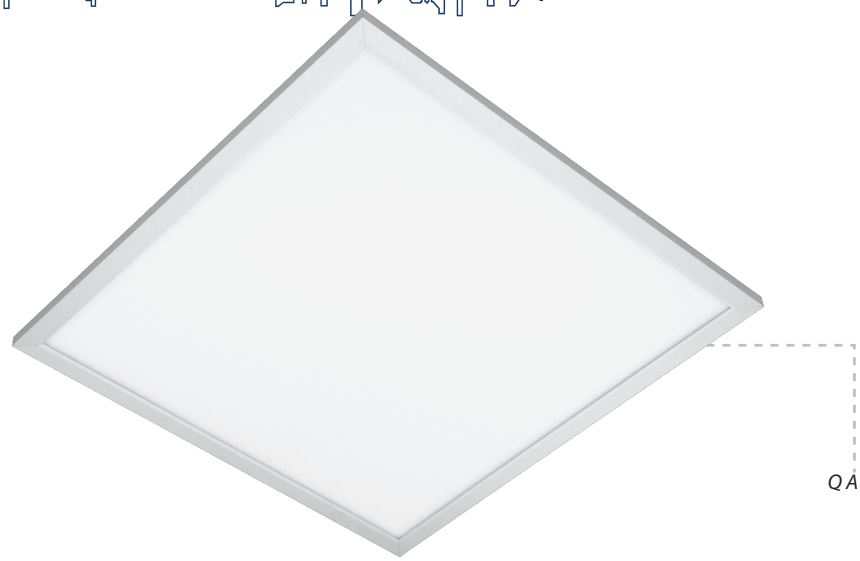

Q A

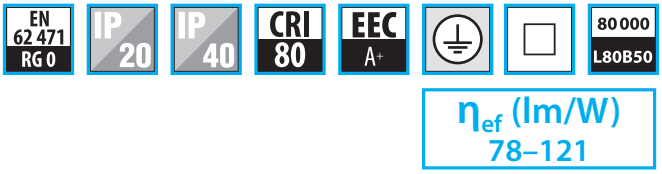

η_{ef} (lm/W)
78–121



Q

LED panel

Body:
Elox aluminium frame, also available in white on request

Optic:
Translucent acrylic layer with opal cover

Version (body shape):
Q..A – square 600x600 mm
Q..B – rectangle 600x300 mm
Q..C – rectangle 1200x300 mm
Q..D – rectangle 1200x600 mm
Q..E – square 300x300 mm
Q..F – rectangle 1500x300 mm

Installation way:
Q - insulation class II, for recessed installation into a raster ceiling 600x600 mm or 625x625 mm. Using accessories the panels can be also installed as pendant, surface or recessed into gypsum plasterboard.
QP - insulation class I, for surface installation or recessed installation into raster ceiling. Using set ZH/UNI4 the panels can be suspended.


Note:
QD (QPD) - panel with a decorative motives - see page 141

Accessories:
ZH/UNI4 - universal 4-wires suspension
UQRAM - a frame for surface installation of Q panels
QVESTRAM - a frame for recessed installation of Q or QP into gypsum plasterboard ceiling
51009913 - magnetic holder for surface instalation on gypsum ceiling of Q panels (4pcs for a panel type A, B, C or E, 6pcs for a panel type D or F)
NM – independent emergency module
VESTSET – set of clips for recessed installation of Q or QP into modular ceiling with hidden profiles

2200	2700	2900	3800	5300	6200	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	×	○	○	○

● default ○ optional × not possible

SURFACE INSTALLATION BOX

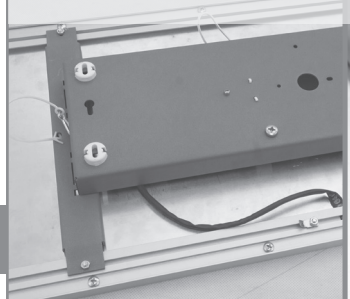

QP - SAFETY HOLDER



51009913 - MAGNET




PENDANT INSTALLATION



Codes: Q3A600/ 700ND

Q	3	A	600	/700ND
Luminaire type Q - recessed / pendant fitting QP - surface / recessed / pendant fitting QD - fitting with a decorative motive	Color temperature: 2 = 2900K, 3 = 3800K, 5 = 5300K	Body shape: A - square - 600x600 mm B - rectangle - 600x300 mm C - rectangle - 1200x300 mm D - rectangle - 1200x600 mm E - square - 300x300 mm F – / rectangle - 1500x300 mm	Modul: 600, 625	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI

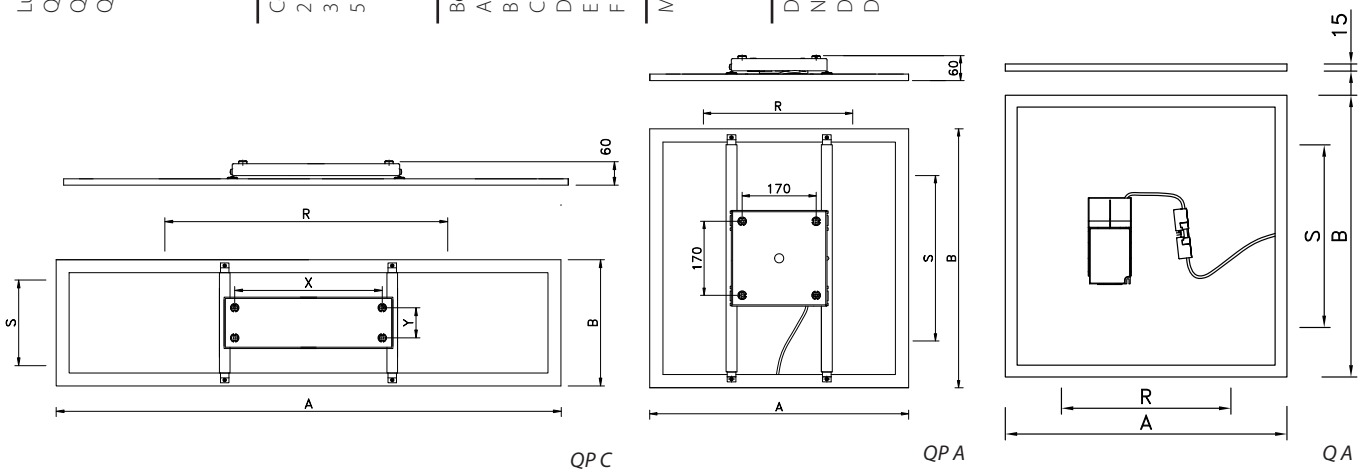

QP C *QP A* *Q A*

Q	W	lm	Modul 600		Modul 625		R	S	kg
			A	B	A	B			
Q A/700	34	4 100	596	596	622	622	200-530 (600x600) 200-555 (625x625)	555 (600x600) 580 (625x625)	4,5
Q A/1050	52	5 800							
Q B/350	17	1 800		296	x	x	200-530	255	2,8
Q B/500	26	2 600							
Q C/700	35	4 000	1196				450-900		4,6
Q C/1050	54	5 650							
Q D/1400	70	8 500		596				555	9
Q D/2100	111	12 500							
Q E/250	9	700	296	296			190-250	255	1,8
Q E/700	23	2 000							
Q F/1050	49	5 200	1496				800-1100		5,8
Q F/1400	66	6 600							

QP	W	lm	Modul 600		Modul 625		R	S	X	Y	kg
			A	B	A	B					
QP A/700	34	4 100	596	596	622	622	200-530 (600x600) 200-555 (625x625)	555 (600x600) 580 (625x625)	170	170	5,9
QP A/1050	52	5 800									
QP B/350	17	1 800		296	x	x	200-530	255	300	90	3,6
QP B/500	26	2 600									
QP C/700	35	4 000	1196				450-900		410		5,9
QP C/1050	54	5 650									
QP D/1400	70	8 500		596				555 (600x600) 580 (625x625)	460	180	12
QP D/2100	111	12 500									
QP E/250	9	700	296	296			x	x	170	170	2,2
QP E/700	23	2 000									

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.