
SPMI

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | IP 43 | CRI 80 | EN 62 471 RG 0 | EEC A+ | 80 000 L80B50

η_{ef} (lm/W) 94–107



SPMI3000



SPMI3000

Recessed LED downlights

Body:
White painted aluminium body

Optic:
Highly polished aluminium reflector
Opal glass cover

Application:
Recessed downlight for installation into false ceiling.

Versions:
B – reflector diameter 130 mm
C - reflector diamerer 190 mm
D - reflector diameter 240 mm

2200	2700	3000	4000	5000	6500	MIX	RGB	
×	○	○	●	○	×	×	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	×	×	×	×	○	×

● default ○ optional × not possible

CONNECTOR



FIXING CLIP



DETAIL OF REFLECTOR




Codes: SPMI1000KO3V2CB/ND


SPMI	1000	KO	3	V2	C	B	/ND
Luminaire type	Light output (lm)	Cover type: O – opal glass	Color temperature: 3 = 3000K 4 = 4000K	Used LEDs	Body diameter: B – body size 130 mm (4") C – body size 190 mm (5") ring outside diameter D - body size 240 mm (6") ring outside diameter	Body colour: B – white	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI

SPMI	SPMI700	SPMI1000	SPMI1500	SPMI2000	SPMI3000
Power	8 W	10 W	15 W	20 W	28 W
luminaire light output	750 lm	1000 lm	1500 lm	2100 lm	3000 lm
efficiency	94 lm/W	100 lm/W	100 lm/W	105 lm/W	107 lm/W
conventional lamps equivalent *	1x13W	2x13W 1x18W	2x18W 1x26W	2x26W 1x42W	2x42W

* approximate comparison, does not replace ligh calculation

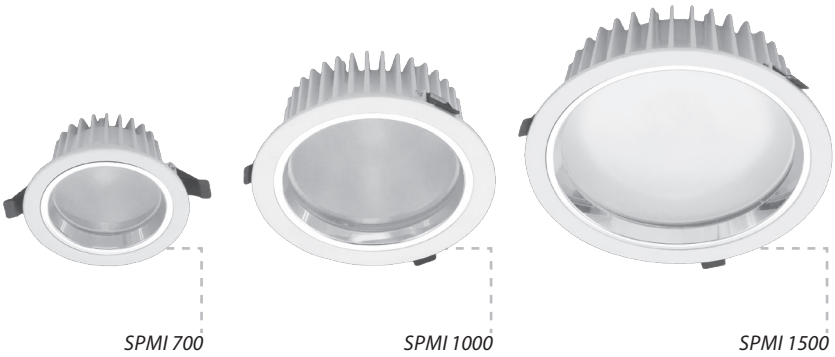

SPMI 700 *SPMI 1000* *SPMI 1500*
2000
3000

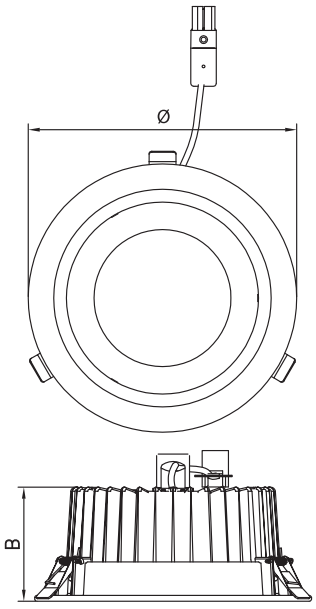

	W	lm	Ø	B	□	kg
SPMI700KO	8	750	130	64	122	0,7
SPMI1000KO	10	1 000	190	78	178	1
SPMI1500KO	15	1 500	240	87	225	2
SPMI2000KO	20	2 100				
SPMI3000KO	28	3 000				

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.