

STL

LED | 220 V 240 V 50-60 Hz | DIMM | IP 65 | IK 08 | CRI 70 | EN 62 471 RG 0 | EEC A+ | 100 000 L70B50


η_{ef} (lm/W) 140–156

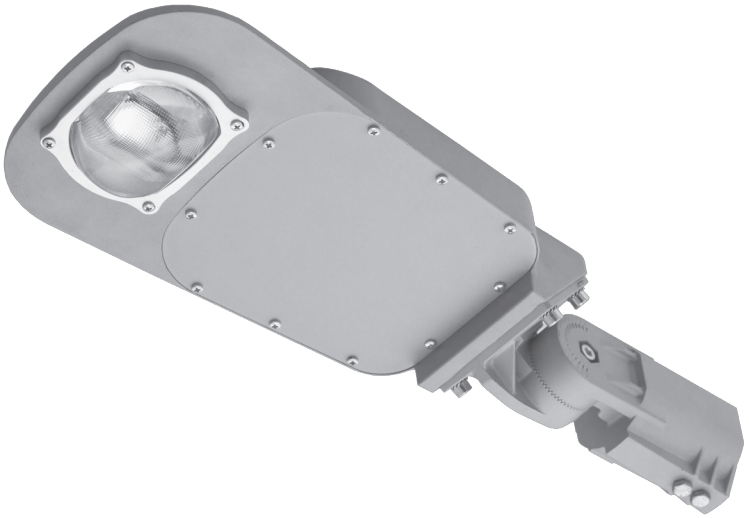

STL



STLC



STLP

LED street light fitting

Body:
Polyester powder painted non-corressive high-pressure die-cast aluminium

Optic:
Asymetric glass optic
STL C – optic for roads
STL P – optic for open areas

Application:
Mounting module is fixed to any post top 60 mm or side entry spigot 60 mm.
Adjusting angle from -30º to +90º.
Reco mmended height of installation 4-8 m.

Accessories:
PR42/60 - Flange reduction 42 mm/60 mm
245039902 – wall holder

2200	2700	3000	4000	5000	6500	MIX	RGB	
×	×	●	○	○	×	×	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	×	×	×	×	×	●

● default ○ optional × not possible




OPTIC



BODY - COOLER




WALL HOLDER 245039902



ADJUSTABLE FLANGE

Codes: STL4000C3/ND

STL	4000	C	3	/ND
Luminaire type	Luminaire light output lm	Optic: C – roads P – open area	Color temperature: 3 = 3000K 5= 5000K	Driver type: ND – no dimmable 4DIM – dimmable DALI/STEPDIM/ ASTRODIM

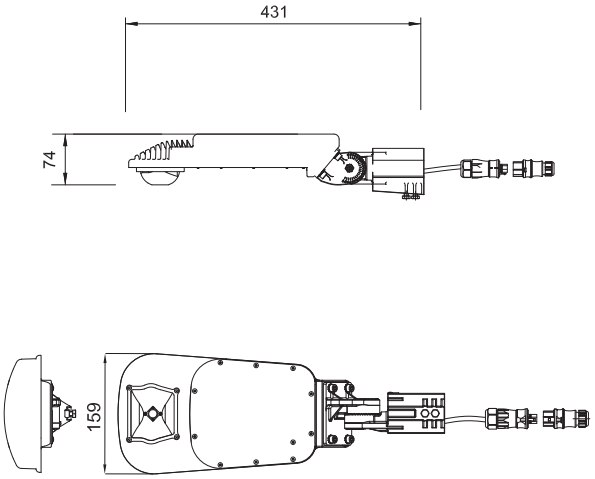

STL	W	lm		kg
		C	P	
STL4000	27	4000	4000	5
STL6000	39	5600	5600	
STL8000	60	8700	8800	

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.