

UL

LED | 220 V 240 V 50-60 Hz | DIMM | IP 65 | CRI 70 | EEC A+ | 100 000 L70B50 | EN 62 471 RG 0

η_{ef} (lm/W) 114–137

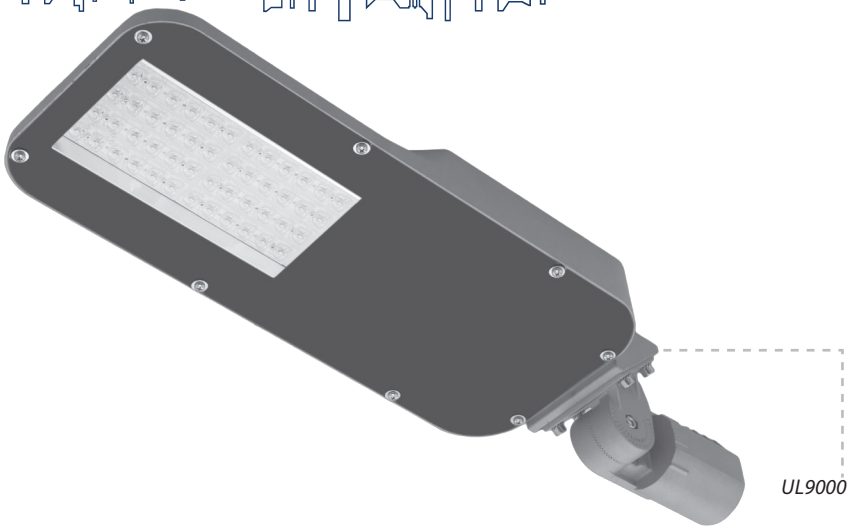

UL9000



UL

LED street light fitting

Body:
Polyester powder painted non-corressive high-pressure die-cast aluminium

Optic:
Asymatric glare-free optic lens
Tempered 4 mm flat glass


Application:
Mounting module is fixed to any post top 60 mm or side entry spigot 60 mm.
Adjusting angle from -30º to +90º.
Recommended height of installation 6-14 m.

Accessories:
PR42/60 - Flange reduction 42mm/60mm
245039902 – wall holder


2200	2700	3000	4000	5000	6500	MIX	RGB	
○	○	○	○	●	×	×	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	×	×	×	×	×	●

● default ○ optional × not possible

ADJUSTABLE FLANGE



ADJUSTABLE FLANGE



WALL HOLDER




UL





Codes: UL5000V15/3DIM


UL	5000	V1	5	/3DIM
Luminaire type	Luminaire light output lm	Used LEDs	Color temperature: 2 = 2700K 3 = 3000K 4 = 4000K 5 = 5000K	Driver type: ND – no dimmable 3DIM – dimmable DALI/STEPDIM/ASTRODIM











UL	W	lm					kg
		V11	V12	V13	V14	V15	
		2200K	2700K	3000K	4000K	5000K	
UL 3500 ND	28	2 000	3 070	3 100	3 160	3 200	8
UL 3500 3DIM	30	2 700	3 740	3 780	3 860	3 900	8
UL 5000 ND	38	3 500	4 800	4 850	4 950	5 000	8
UL 5000 3DIM	47	3900	5470	5530	5650	5700	8
UL 7500 3DIM	56	5300	7400	7470	7600	7700	8
UL 9000 3DIM	87	7750	10750	10860	11080	11200	8
UL 11500 3DIM	103	9100	12600	12800	13100	13200	8
UL 14000 3DIM	144	11500	15850	16200	16550	16700	8

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.