
# VL1X

LED | 220 V 240 V 50-60 Hz | SDCM 3 | IP 65 | CRI 80 | 30 000 L70B50 | EN 62 471 RG 0

$\eta_{ef}$ (lm/W) 126–131



VL1X


## LED waterproof light fittings

**Body:**
PC, white painted (RAL 9016) metal sheet, INOX clips

**Optic:**
PC - polycarbonate clear cover

**Accessories:**
ZH/UNI4 – universal 4-wires suspension
Protection grid - OM

**Note:**
Stainless bracket for surface mounting or suspension and 2 gro mmets IP65 are included.
Light fittings VL1X can be installed only into standard ambient conditions, $T_a$ max 25°C

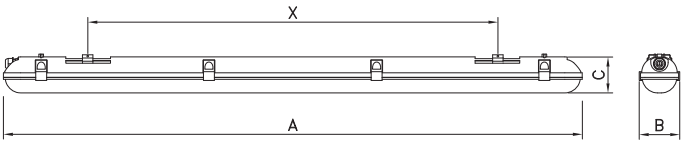


| | W | lm | A | B | C | X | kg |
|---|---|---|---|---|---|---|---|
| VL1X M | 38 | 4 800 | 1270 | 86 | 90 | 900 | 2,2 |
| VL1X L | 58 | 7 600 | 1570 | | | 1200 | 3 |

lm - luminaire light output

| 2200 | 2700 | 3000 | 4000 | 5700 | 6500 | MIX | RGB | |
|---|---|---|---|---|---|---|---|---|
| ✕ | ✕ | ○ | ● | ○ | ○ | ✕ | ✕ | ✕ |
| ON OFF | 1-10V | DALI | | | | INT | EXT | |
| ● | ✕ | ○ | ✕ | ✕ | ✕ | ✕ | ✕ | ✕ |

● default ○ optional ✕ not possible

