

PL



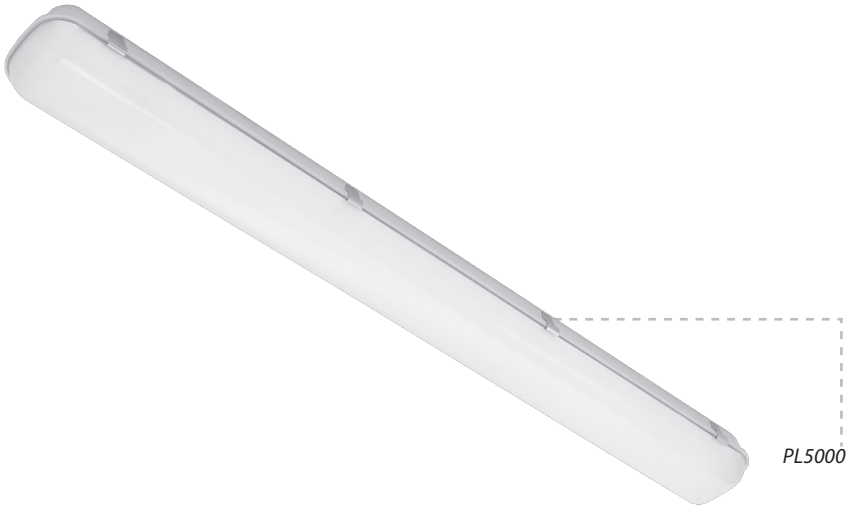

PL5000

η_{ef} (lm/W)
132–150



PL

LED interior waterproof fittings

Body:
High quality glass reinforced pressed polyester body + galvanized white painted metal sheet, INOX clips

Optic:
CO – polycarbonate opal cover
PM – opal PMMA cover

Application:
These light fittings can be used as surface mounted or suspended.
Suspension hook and fixation clip is part of packaging (ZAHO+ZAKO).

Accessories:
ZH/UNI4 – universal 4-wires suspension
Protection grid – OM
Suspension hook – ZAHA
Fixation clip – ZAKO

Versions:
F – with flexible cord
SM - fitting with MW senzor
P – continuous assembly (through wiring) 5x1,5 mm²

Note:
Fittings with PMMA cover can be also used into objects with lower concentration of ammonia.
Fittings cannot be used for outdoor installation..

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	✕	○	●	○	○	✕	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	○	✕	✕

● default ○ optional ✕ not possible


PL...1N NARROW



PL...2W WIDE



CLIP



GRO MMET




Codes: PL5000M2W3ND

PL	5000	M	2	W	3	ND
Luminaire type	Light output	Body lenght: S = 600 mm M = 1200 mm L = 1500 mm	Nr of ligh strips	body width: N = narrow body W = wide body	Color temperature: 3 = 3000K 4 = 4000K, 5 = 5700K	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI

code	W	lm	lm/W	body	lamps substitution
PL1000S1W...	11	1 450	132	675 mm wide	1x18W T8
PL2500S2W...	20	2 750	138	675 mm wide	2x18W T8
PL2500M1N ...	20	2 700	135	1275 mm narrow	1x36W T8 1x28W T5 1x35W T5
PL5000M2W...	40	5 500	138	1275 mm wide	2x36W T8 2x28WT5 2x35W T5 1x80W T5
PL3500L1N...	32	4 400	138	1575 mm narrow	1x58W T8 1x49W T5 1x54W T5
PL7000L2W...	50	7 500	150	1575 mm wide	2x58W T8 2x49W T5 2x54W T5
PL10000L2W...	68	10 200	150	1575 mm wide	2x80W T5



PL2500S2W

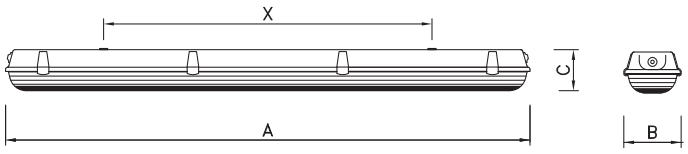

	W	lm	A	B	C	X	kg
PL1000S1W	11	1 450	675	135	100	400	1,8
PL2500S2W	20	2 750					1,8
PL2500M1N	20	2 700	1275	84		800	2,2
PL5000M2W	40	5 500		135			2,6
PL7000M2W4	52	7 100					
PL3500L1N	32	4 400	1575	84		1100	2,8
PL7000L2W	50	7 500		135			3,2
PL10000L2W	68	10 200					
PL14000L2W	95	13 100					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.