
GAME


LED | 220-240V 50 Hz | DIMM | CRI 80 | IP 40 | MULTI | SDCM 3 | max T_a 45°C | EN 62 471 RG 0 | 80 000 L80B50

η_{ef} (lm/W) 16–186

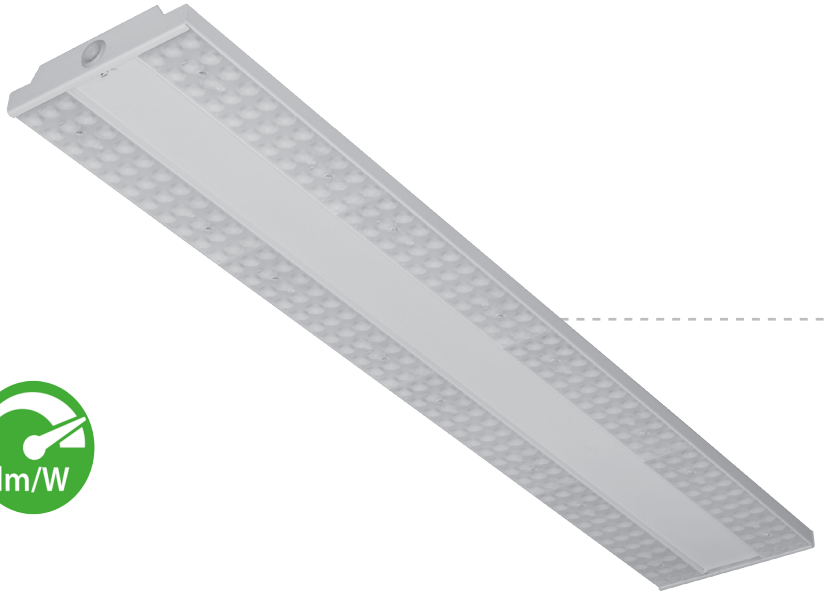


GAME M


lm/W



GAME N60



GAME W90



GAME AS

Industrial LED fittings

Body:
Powder painted non-corressive high-pressure die-cast aluminium with steel endcaps and gear box

Optic:
N – narrow beam 60°
W – wide beam 90°
AS – asymetric


Application:
Ceiling installation as standard
Pendant or wall installation using accessories

Accessories:
GAME/SD – set of movable wall brackets
GAME/VL – set of holders for installation on a horizontal rope
GAME/HAK – set of hooks for a chain suspensions

Note:
Light fittings are certificated for sporthalls acording DIN VDE 0710-13

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	○	○	✕	●
ON OFF	1-10V	DALI				INT	EXT	
●	✕	○	✕	✕	○	○	✕	✕


● default ○ optional ✕ not possible



SIDE CABLE ENTRY




OPTICS




BACK CABLE ENTRIES

Code: GAME 150M8/4W90C/90/P


GAME	150	M	8	/4	W90	C	/ND	/P
Luminaire type	Light output	Body S – 585mm M – 1165mm L – 1735mm	Nr. of LED modules	Color temperature 3 = 3000K 4 = 4000K 5 = 5700K	Optic: EN– extra narrow beam 30° N – narrow beam 60° W – wide beam 90° AS – asymetric	Color: C – black S – silver B – white	Driver type: ND – fix output DALI – controlable I NDMULTI - luminaire with switchable power	Specifications: /P – through wiring

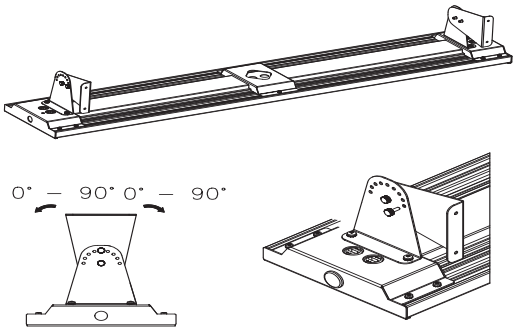


GAME /SD

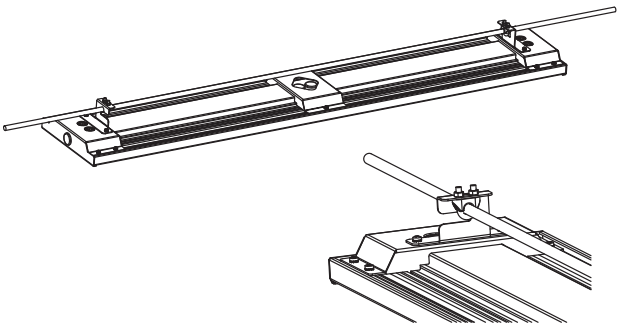

GAME /VL

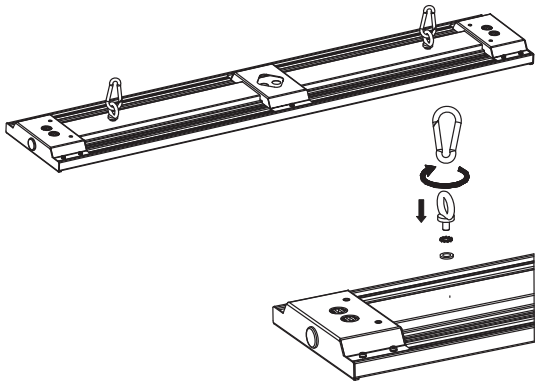

GAME /HAK

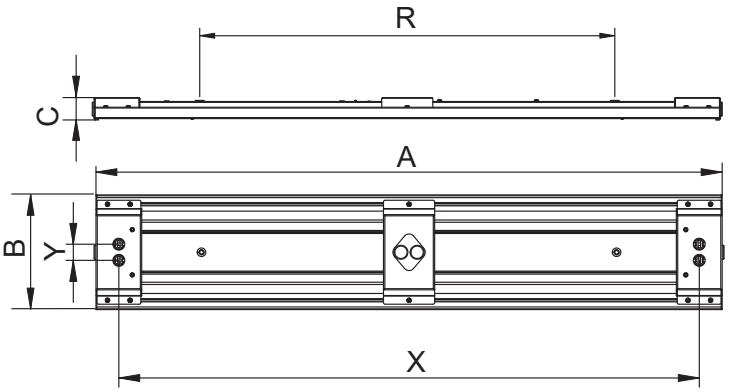

GAME MULTI	W	lm / W	A	B	C	X	Y	R	kg
GAME 180M W	60 -98	11 100 - 17 400	1165	213	42	1180	30	770	5,2

GAME	W	lm			A	B	C	X	Y	R	kg
		N	W	AS							
GAME 080S	45	8 000	7 500	7 200	585	213	42	500	30	195	3,5
GAME 150M	85	15 800	15 500	15 000	1165			1180		770	5,2
GAME 250L	130	24 000	22 500	21 500	1735			1650		1345	7,2

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.